

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

LSV 8ft LED Vapor Tight Series

Wattage and Color Selectable

Product Description:

The new LSV 8ft LED Vapor Tight Fixture is wattage and CCT selectable offering 9 different combinations in one product. The product is keeps out water and dust with its IP65 rating making it ideal for car wash operations, parking garage lighting and stairwell lighting. Other applications include utility lighting, low bay lighting, airports, tunnels, and maintenance areas.



Features:

- CCT and Wattage selectable
- 0-10V dimming standard
- CRI: >80
- Universal voltage 120-277V
- L70 lumen maintenance of 100,000 hours
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
EM Model: -4°F to 104°F (-20°C to 40°C)
- ETL sanitation listed to NSF/ANSI2 standards
- Default setting for WCS models is set to lower wattage and 4000K
- Optional motion sensor available
- Fixture may be surface (accessories sold separately)

Ordering Information

FAMILY	SIZE	VOLTAGE	WATTAGE (NOMINAL)	CCT SELECT	BATTERY BACKUP OPTIONS	SENSOR
LSV= Vapor Tight Linear Series	8= 8FT	U= 120-277V	65W= 65/75/90W	CS= Color Selectable (3500K/4000K/5000K)	[BLANK]= None EM= Emergency Back-up	[BLANK]= None MS= Motion Sensor

Stocked Items

ORDER CODE	MODEL NUMBER	DLC PRODUCT ID #	DLC CATEGORY
105687	LSV8U65WCS	PAROYIDO, PZVHG7BM, PSUPRPLZ	Direct Linear Ambient Luminaires, Stairwell and Passageway Luminaires, High-Bay Luminaires for Commercial and Industrial Buildings

LSV 8ft LED Vapor Tight Series

Wattage and Color Selectable

Accessories (SOLD SEPARATELY)


ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
74139	MLCHKLSV15	Cable Kit 15' Loop X Toggle Y 1 Pair	
104799	RMRC-100	Remote Control (for MS option only)	

Specifications

Specifications	LSV8U65WCS		
	Power Consumption	65W	75W
Lumens Delivered	8,450 lm	9,750 lm	11,700 lm
Efficacy	130 lm/w	130 lm/w	130 lm/w
CRI	≥180		
Color Temperature (K)	3500K, 4000K, 5000K		
L70 Lumen maintenance	≥100,000 hours		
Power Factor	≥0.9		
Input Voltage	120-277V		
Operating Temperature	-40°F to +104°F (-40°C to 40°C) except EM models EM Model: -4°F to 104°F (-20°C to 40°C)		
Qualifications	UL Listed, FCC, Rohs Complaint, ETL Sanitation Listed		
Environment	UL listed for Wet location		
Warranty	10 years. Check maxlite.com/warranties for details.		

See page 1 footer

Dimensions

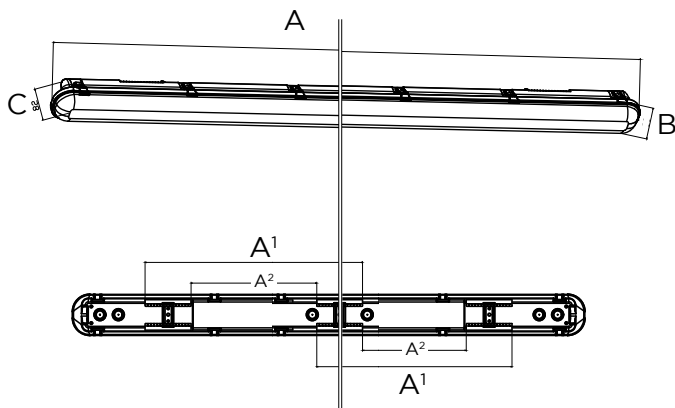


PRODUCT	A (L)	A ¹	A ²	B (W)	C (H)
LSV8U65WCS	94.4"	42.9"	35.0"	3.54"	3.22"

Product includes 3 mounting clips.
A1 and A2 represents spacing range between the clips.



LSV 8ft LED Vapor Tight Series *Wattage and Color Selectable*

c-Max Controls Micro-sites and Compatibility Guide



Product Compatibility Guide

Compatible Controls (SOLD SEPARATELY)*

The table below shows a small subset of control nodes from each tier that directly plug in with the fixture. Refer to individual microsities above for more accessories that could be added based on application requirements.

ORDER CODE	MODEL NUMBER & LINK TO DATA SHEET	DESCRIPTION	QR CODE TO DATA SHEET	IMAGE
c-Max Basic				
105567	CN-REMOTE	CONTROL NODE REMOTE CONTROL		
105565	CN-RDMSW**	CONTROL NODE ROUND, WHITE		
106903	CEA-RDW**	C-MAX EXTERNAL ADAPTER ROUND, WHITE		
108877	CEA-EJ50**	c-MAX EXTERNAL ADAPTER EXTENDER WHITE (FITS 1/2" KO 50MM)		
c-Max Network				
106391	NN-RDW**	NETWORK NODE ROUND, WHITE		
105905	NN-RDWSW**	NETWORK NODE ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
c-Max EasyRF				
111891	RF-RDMSW**	EasyRF NODE ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
110962	RF-REMOTE	EasyRF REMOTE CONTROL COMMISSIONING TOOL		
c-Max Network Partners - Silvair				
111150	NN-RDWSW-SL**	SILVAIR NETWORK NODE ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		
c-Max Network Partners - Casambi				
112430	NN-RDMSW-CA**	CASAMBI NETWORK NODE ROUND, PIR MOTION SENSOR/DAYLIGHT HARVESTING, WHITE		

* Note - This controls ready fixture is compatible with the c-Max platform supporting multiple tiers of controls. The table above shows a small subset of control nodes from each tier that directly plug in with the fixture. Refer to individual microsite above for more accessories that could be added based on application requirements

** Note - To use any of the round control nodes, the CEA-RDW External Adapter and CEA-EJ50 Adapter Extender also need to be purchased separately.