

PRODUCT CATALOG



MaxLite[®]
A NEW WAVE OF LIGHT

2025-2026 | www.maxlite.com

Our Vision: Transform the way people experience light

MaxLite has been committed to providing energy-efficient lighting products since 1993. As one of the industry's early adopters of LED technology, MaxLite offers a comprehensive line of high-quality, certified indoor and outdoor LED lamps and luminaires—along with its award-winning c-Max Lighting Controls solution. A five-time recipient of the ENERGY STAR Partner of the Year Award for its industry leadership, MaxLite continues to be at the forefront of energy-efficient technologies through the innovative research and development capabilities of its teams and facilities in New Jersey, Indiana, and globally. MaxLite is a nationally certified Minority Business Enterprise (MBE) by the National Minority Supplier Diversity Council.

Our Products:

MaxLite supports our products with industry-leading warranties and customer support. Most MaxLite products are certified by ENERGY STAR® or listed by DesignLights Consortium® (DLC) and qualify for utility rebate programs. We also offer a large selection of lamps and luminaires that meet Title 20 and Title 24 JA8-2016/2019-E requirements in California. Our products are stocked for immediate purchase and delivery, shipping within the United States in two business days on standard orders.

Our Services:

We work with our customers to ensure that our products meet the needs of their installation by providing a full range of complimentary services, including:

- Facility audits
- ROI calculations
- Local representation
- Lighting layouts
- Utility rebate assistance
- Lifetime product support



(HQ) Pinebrook, NJ



Greenwood, IN



Placentia, CA



Nationally Certified Minority Business Enterprise

MaxLite is a nationally certified Minority Business Enterprise (MBE) by the National Minority Supplier Diversity Council (NMSDC). We also hold state-level MBE certifications - contact us for details.



10-Year Warranty - Labor Included!*

MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures.

Go to [MaxLite.com/warranties](https://www.maxlite.com/warranties) for applicable terms and conditions.

*registration required

Design Innovation



Our products have received numerous awards, including:



Key Distribution Segments & Strengths

STOCK & FLOW
Counter Business MRO



PROJECT SALES
Quick Ship



DESIGN-BUILD
Value Engineered



ENERGY SERVICES
ESCO



NATIONAL ACCOUNTS
National Chains



CONTROLS

c-Max™ Overview 2
 c-Max™ Basic Controls 3-4
 c-Max™ EasyRF Controls 5
 c-Max™ Network Controls 6-8
 c-Max™ Network Partners 9-11

INDOOR LED FIXTURES

BayMax™ HLS Series - Enhanced Linear Highbays 12-13
 HLE Series - Value Linear Highbays 13-14
 HLV Series - Value Linear Highbays 14-15
 BayMax™ BPHE3 Series - Value Round Highbays 16
 LSV Series - Enhanced Vapor Tight Fixtures 17
 VE Series - Value Vapor Tight Fixtures 18
 LSU Series - Enhanced Utility Wrap Fixtures 18-19
 UE Series - Value Utility Wrap Fixtures 19
 LS3 Series - Enhanced Linear Strip Fixtures 20
 LSE Series - Value Linear Strip Fixtures 21
 RS2 Series - Enhanced Linear Strip Retrofits 21
 T8 Lamp Ready 4' Vapor Tights 22
 T8 Lamp Ready 4' Utility Wraps 22
 T8 Lamp Ready 4' Linear Utility Strips 22
 T5 Lamp Ready 4' Utility Strips 23
 T8/T5 Lamp Ready 4' High Bays 23
 T8 Lamp Ready 4' Retrofit Strip 23
 L-Max Linear LED Luminaire 2', 4', 8' 24-25
 FlatMax™ MLFP G5 Series - Enhanced Flat Panels 26
 DLC Premium Value Flat Panels 28
 FlatMax High Lumen Contols Read Flat Panels 29
 ArcMax™ MLVT G2 Series Enhanced Troffers 30
 TV Series Value Troffers 31
 FPR Series - Enhanced Panel Retrofit Kit 32
 TRK G2 Series - Enhanced Troffer Retrofit Kit 33
 TRKE Series - Value Troffer Retrofit Kit 34
 MRBK Series - Value Magnetic Bar Retrofit Kits 35
 Recessed Architectural Downlights 36
 Select the Reflector/Optional New Construction Frame 36
 RCF Series - Value Triac Dimming Commercial Downlights 37
 RCF Series - Value 0-10V Dimming Commercial Downlights 38
 RCF - Multi-Mode Dimming Commercial Downlights 39
 RCF Series - 8" 0-10V Dimming Commercial Downlights 39
 Fire Rated Slim Baffle Downlights 39
 Litebars 40
 Optional Accessories 40
 Shop Light Single/Two Tubes 41

RESIDENTIAL FIXTURES

Residential Recessed Baffle Downlights 42
 Adjustable Residential Retrofit Downlight w/Selectable CCT 42
 Slim Smooth Baffle Round Downlight 42
 Disc Lights w/Selectable CCT 43
 Flush Mounts - Ceiling Fixture Architectural Design 43
 Flush Mounts - Ceiling Fixture Puff Design 43
 Outdoor Wall Lantern Contemporary 44
 Outdoor Wall Lantern Contemporary with DTD 44
 Outdoor Wall Lantern Harbor Glow 44
 Outdoor Wall Lantern Classic 45
 Outdoor Wall Lantern Modern Hearth 45
 Outdoor Wall Lantern Modern Craftsman Style 45
 PureAirMax Tabletop Air Purifier 46
 Garage Light 4 Panel 46
 Smart Wall Plugs, Plug Strips 46
 Slim Desk Lamps 47

OUTDOOR LED FIXTURES

M Series™ Area Fixtures 49
 AE Switch Manual Changeable 50
 AE Switch Remote Control
 (Changeable CCT/Distribution from the Ground) 50
 Barn Lights 50
 Enhanced Canopy/Parking Luminaires 51
 Value Canopy/Parking Luminaires 51
 Post Top Spider Mount 52
 PathMax™ Classic/Slim Bollards Series 52-53
 M Series™ Floods 53
 FieldMax™ Sports/High Output Floods 54
 Slim Flood Lights/CCT & Wattage Slectable 54
 Adjustable Beam Floods 54-55
 Bullet Flood Lights 55

OUTDOOR LED FIXTURES

3"/4"/5" Straight Square Poles (Steel and Aluminum Options) 56
 3"/4"/5" Straight Round Poles (Steel and Aluminum Options) 57
 Mounting Accessories 58
 GuardMax™ Oval Wall Packs 59
 GuardMax™ Slim Security Light/DLC 59
 GuardMax™ Emergency Motion Sensor Security Light 60
 Motion Sensor Security Light 60
 Area Security Light 60
 Lamp Included Vaporproof Jelly Jars 61
 Integrated Adjustable Vaporproof Jelly Jars w/Selectable CCT 61
 M Series™ Wall Mounts 61-62
 WallMax™ Cut Off Wall Packs 62
 WallMax™ Thin Cutoff Wall Packs 63
 WallMax™ Open Face Wall Packs 63-64
 WallMax™ Compact Open Face Wall Packs 64

HARSH & HAZARDOUS

Flood Class I Division 1 HL-AR-D1 Series 65
 Flood Class I Division 2 HL-AR Series 65
 Wall Pack Class I Division 2 HL-WP Series 65
 Linear Class I Division 2 HL-LI Series 66
 Linear Class I Division 1 HL-LI Series 66
 High Bay Class I Division 2 HLRS Series 66
 High Bay Class I Division 2 HLRM Series 67
 Low Bay/Jelly Jar Class I Division 2 HLRS Series 67

EXIT & EMERGENCY


Emergency Lights 68
 High Capacity Emergency Lights 68
 Remote Heads 68
 High Capacity Remote Heads 68
 Exit Signs 69
 Exit Sign Combos 69
 Exit Sign Combos Dual Color 69
 Edgelit Exit Signs 69
 Aluminum Exit amd Combo Signs 69

GENERAL PURPOSE LAMPS

A19/A21 Clear/Frosted Filament Lamps JA8 70-71
 ST19 Clear/Vintage Filament Lamps JA8 72-74
 B10 Frosted/Clear Filament Candelabras JA8 74-75
 T12/T10/S14 Clear/Frosted Filament Lamps 76
 G16.5, G25, G40 Frosted/Clear Filament Lamps JA8 78-81
 G16.5, G25 Globe Lamps 81
 Dimmable Enclosed Rated A-Lamps 82
 High Output Dimmable/Non-Dimmable A-Lamps 83
 A21 3-Way A-Lamps 83
 A19 Wingstack A-Lamps 84
 Smart A19 Lamp 85
 CCT Selectable A-Lamps and DTD A-Lamps 85
 PL Single Type A+B Hybrid 86
 PL Double Type A+B Hybrid 86
 PL Double Type A 87
 PL Triple Type A 87
 PL Triple Type B 88
 PL Retrofit Lamps Ballast Bypass w/selectable CCT 88-89
 PL Retrofit Lamps DirectFit w/selectable CCT 89
 PLL Retrofit DirectFit/Bypass Lamps 89-90
 MR16 Base Lamps 90-91
 BR/R Dimmable Lamps/Value 91
 PAR Lamps, Dimmable Wet Location 92
 PAR Lamps, Non Dimmable 93
 VersaMax T8 Modular 8' Type B 94
 VersaMax T8 UL Type A+B Hybrid 94
 VersaMax T8 UL Type B Ballast Bypass 94
 T8 LED Linear Utility Strip - Lamp Ready 95
 T8 U-Bend Lamp, Direct Fit 95
 T8 U-Bend Lamp, Direct Fit/Ballast Bypass 95
 T8 Type A - Direct Fit 96
 T8 Type B - Ballast Bypass 96-99
 T5 Type B - Ballast Bypass 99
 Battery Back Up 100
 Emergency Battery Back Up Type B/C Linear Lamps 100
 Single End Wiring Harnesses 100
 T8 (G13) Non-Shunted Lamp Holders 101
 Retrofit Miniature Lamps 101

cMax™

LIGHTING CONTROLS



Simple, Versatile, Future Ready and Scalable Technology

c-Max™ is a true plug-and-play platform that offers multi-tier control solutions. Experience the innovation of the integrated USB-C receptacles across a broad set of MaxLite's controls ready indoor and outdoor fixtures that makes it easy to add Luminaire Level Lighting Control (LLLC). Pair c-Max sensors/nodes with the correct CR fixtures and you are all set! With a broad offering of sensors, network nodes, zone controllers and accessories, c-Max Lighting controls adapts easily from small to large installation projects. From stand-alone Basic to DLC NLC qualified Network to enterprise-level controls, c-Max provides scale and affordable solutions for facilities to save energy, improve occupant comfort and achieve code compliance.



Simple

- Easy DIY installation - low voltage sensor plugs into USB-C receptacle on MaxLite controls ready fixture
- Easy commissioning (Via remote or iOS or Android app)
- Easy on budget - affordable and scalable solution



Versatile

- Scale across both indoor and outdoor product portfolio
- Multiple energy-saving features packed in small form factor
- Choose from a variety of devices including sensors, network nodes and powerpack



Future Ready

- Plug-and-play interface makes it easy to add controls during installation or later
- Upgrade from non-networked to Network controls without removing the fixture
- Scalable technology choices - agnostic to controls technology and connectivity protocols



Visit www.maxlite.com/cmax for how-to videos, FAQs and more!





BASIC LIGHTING CONTROLS

Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105564	CN-RTMST	Control Node Rectangular, Micro-wave Motion Sensor/Photocell, Translucent	Indoor & Outdoor	High Trim, Motion Sensing (Microwave), Photocell, Daylight Harvesting (on/off)
	105890	CN-RTPSW	Control Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)
	105891	CN-MGMST	Control Node Rectangular, Micro-wave Motion Sensor/Photocell, Translucent	Indoor	High Trim, Motion Sensing (Microwave), Photocell, Daylight Harvesting (on/off)
	105565	CN-RDMSW	Control Node Round, PIR Motion Sensor/Photocell, White, IP66	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)
	111456	CN-RDMSB-V2	Control Node Round, Pir Motion Sensor/Photocell, Bronze, IP66, Version 2	Outdoor	High Trim, Motion Sensing (PIR), Photocell
	108689	CNA-RDMSW	Basic Control Node (AJ) Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)

Integral Photocells

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105568	CN-RTPCT	Photocell Node Rectangular, Translucent	Outdoor	Photocell
	105569	CN-RDPCB	Photocell Node Round, Bronze, IP66	Outdoor	Photocell

Accessories

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105567	CN-REMOTE	Control Node Remote Control	Indoor & Outdoor	To be used with CN-RTMST, CN-RTPSW, CN-RDMSW, CN-RDMSB, CN-MGMST
	107785	CEA-RDB**	C-Max External Adapter Round Bronze Or White	Indoor & Outdoor	Adapter Paired with Round Nodes
	106903	CEA-RDW**			

**Adapter compatible with c-Max Network & c-Max Basic Controls



Pair c-Max Basic Nodes with Controls-Ready MaxLite products today, or in the future!



Patent Pending vandal-resistant design with locking screw that secures sensor to fixture.



Controls Ready Fixtures

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! (See individual product datasheets for available controls options and ordering information)



INDOOR

SENSOR	TECHNOLOGY	FlatMax Flat Panels, ArcMax Troffer, FPR Retrofit, TRK Retrofit	LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	ECO High Bay	Linear High Bay	Round High Bay	Magnetic Retrofit Bar Kit or Type C Kit
CN-RTMST*	Microwave						
CN-RTPSW	PIR						
CEA-RDW	Adapter						
CN-RDM-SW**	PIR						
CNA-RD-MSW	PIR						
CN-MGMST	Microwave						

* Must remove the sensor cover on the ArcMax Troffer, TRK Retrofit and LS Strip to fit.

**PIR requires line of sight and cannot not be used in products behind the lens. Compatible with LS and RS Linear fixtures only.

**To use CN-RDMSW with the LSV, LSU and Eco Highbay produces, the CEA-RDW External adapter also needs to be purchased separately

OUTDOOR

SENSOR	TECHNOLOGY	Open Face Wall Pack	Cutoff Wall Pack	Barn Light	Canopy	M Series	AE Slim Area Light	PathMax Slim Bollards
CN-RTMST	Microwave							
CN-RTPCT	Photocell							
CN-RDMSB-V2	PIR*							
CN-RDPCB	Photocell							


*PIR requires line of sight and cannot not be used in products behind the lens

Additional Resources:

Visit www.maxlite.com/cmax-basic-lighting-controls for how-to videos, FAQs and more!



Pair c-Max Basic Nodes with Controls-Ready MaxLite products today, or in the future!



EasyRF

EasyRF is a room-based wireless lighting control system designed for effortless integration of luminaire-level lighting controls (LLLC) in both new construction and retrofit projects. As part of the versatile and multi-tiered c-Max Lighting controls platform, EasyRF simplifies commissioning by enabling groupable wireless controls without the need for a mobile app or gateway.



INDOOR					
NETWORK NODE	RECESSED Flat Panels, FPR Retrofit, ArcMax Troffer, TRK Retrofit	LINEAR LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	Eco/Value High Bay	Linear High Bay	EasyRF Remote Control Commissioning Tool
RF-RTPSW					
RF-RDMSW					
CEA-RDW					
WRF2RB-W					
RF-REMOTE					

*PIR requires line of sight and cannot not be used in products behind the lens.

**To use RF-RDMSW with the above linear and highbay products, the CEA-RDW External adapter also needs to be purchased separately

Products

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	106001	RF-RTPSW	Network Node Rectangular, Vacancy Sensor, White	Indoor	Bluetooth, Motion Sensor (PIR), Vacancy Sensor, High Trim, Scenes, Schedules
	105905	RF-RDMSW	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	105905	WRF2RB-W	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	108688	RF-REMOTE	Network Node (AJ) Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules



NETWORK LIGHTING CONTROLS

Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	106059	NN-RTPSW	Network Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	106001	NN-RTVSW	Network Node Rectangular, Vacancy Sensor, White	Indoor	Bluetooth, Motion Sensor (PIR), Vacancy Sensor, High Trim, Scenes, Schedules
	105893	NN-RTDHW	Network Node Rectangular, Daylight Harvesting, White	Indoor	Bluetooth, Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	111459	NN-RDMPBXR	Network Node Round, PIR Motion Sensor, Photocell, Black, Extended (XR) Range	Outdoor	Bluetooth, Motion Sensor (PIR), Photocell (On/Off), High Trim, Scenes, Schedules
	105905	NN-RDMSW	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	108688	NNA-RDMSW	Network Node (AJ) Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Integral Nodes

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105892	NN-RTW	Network Node Rectangular, White	Indoor & Outdoor	Bluetooth, High Trim, Scenes, Schedules
	105895	NN-MGT	Network Node Magnet, Translucent	Indoor	Bluetooth, Magnetic, High Trim, Scenes, Schedules
	105897	NN-RDB	Network Node Round Bronze Or White	Indoor & Outdoor	Bluetooth, High Trim, Scenes, Schedules
	106391	NN-RDW			
	109413	NNA-RDW	Network Node W/ Audio Jack, Round, Bluetooth, 12VDC, White	Indoor	Bluetooth, High Trim, Scenes, Schedules

Wall Switches

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	109498	WNS3U-W	120-277V 3-button Network Wall Switch, Bluetooth, White	Indoor	AC, Bluetooth, On/Off, Dim Up/Dim Down
	109499	WNS7U-W	120-277V 7-button Network Wall Switch, Bluetooth, White	Indoor	AC, Bluetooth, On/Off, 4 Programmable Scenes, Dim Up/Dim Down
	111401	WNS8-W	8 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Scenes, Manual Dimming
	108392	WNS5-W	5 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Scenes, Manual Dimming
	109111	WNS3-W	3 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Manual Dimming
	109112	WNS1-W	1 Button Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off



NETWORK LIGHTING CONTROLS

Relays

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	106318	NPP-300W	120-277V Network Power Pack 300W Max	Indoor	Bluetooth, High Trim, Scenes, Schedules
	110750	PPA-06A	12V POWER PACK, 6A, 120-277V	Indoor	Bluetooth, High Trim, Scenes, Schedules
	109502	WWR-PL20A-W	120V NETWORK (BLUETOOTH) 20A WALL RECEPTACLE, WHITE	Indoor	Bluetooth
	109113	NPP-ZC20A	120-277V Network Zone Controller 20A 0-10V	Indoor	Bluetooth, High Trim, Scenes, Schedules
	111764	NPP-ZC20A-V2	120-277V Network Zone Controller 20A 0-10V with 12V Aux	Indoor	Bluetooth, High Trim, Scenes, Schedules
	109329	NPP-PL20A	Network Power Pack - Plug Load 20A With Dry Contacts	Indoor	Bluetooth, High Trim, Plug Load, Schedules
	106904	CNS-PSW	120-277V Network Relay PIR Motion Sensor, Daylight Harvest, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Ceiling Mounted Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	107788	NPPSL-PSW*	Network Power Pack PIR Sensor, 12V, White	Indoor	Motion Sensor (PIR)
	107791	CNSL-PSW**	Network Sensor 12V, Bluetooth/ PIR Motion Sensor /Daylight Harvest, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Accessories

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	109114	NPP-EM	120-277V Network UL924 Wireless Emergency Module	Indoor	Bluetooth, UL924
	108859	NN-RTC	Network Node Real Time Clock Sync Device	Indoor & Outdoor	Real Time Clock
	109419	NN-BRG01	c-Max Network Bridge -3rd Party Integration	Indoor	Ability to connect to 3rd party systems
	109438	ISSY994-CMAX-OADR	Open ADR Demand Response Gateway	Indoor	Open ADR, Demand Response
	108860	NN-EDC	Network Node Energy Data Collector	Indoor & Outdoor	Energy Monitoring + Real Time clock
	107785	CEA-RDB***	c-Max External Adapter Round Bronze Or White	Indoor & Outdoor	Adapter Paired with Sensors and Nodes
	106903	CEA-RDW***			

*Needs to be paired with NPP-300W
 **May be paired with the NPP-300W or PPA-06A to enable daylight harvesting or could be powered directly with MaxLite CR fixtures
 ***Adapter compatible with c-Max Network and c-Max Basic round sensors/nodes
 c-Max Relays and Ceiling Mounted Sensors can be used with MaxLite or other non-MaxLite luminaires



Pair c-Max Network Nodes with Controls-Ready MaxLite products today, or in the future!



Patent Pending vandal-resistant design with locking screw that secures sensor to fixture.



Controls Ready Fixtures

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! (See individual product datasheets for available controls options and ordering information)



INDOOR						
NETWORK NODE	Flat Panels, ArcMax Troffer, FPR Retrofit, TRK Retrofit	LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	ECO High Bay	Linear High Bay	Round High Bay	Magnetic Retrofit Bar Kit
NN-RTPSW*						
NN-RTDHW						
NN-RTW						
CEA-RDW						
NN-RDMSW**						
NN-RDW						
NNA-RDMSW						
NNA-RDW						
NN-MGT						

*PIR requires line of sight and cannot not be used in products behind the lens. **To use NN-RDMSW with the above linear and highbay products, the CEA-RDW External adapter also needs to be purchased separately

OUTDOOR							
NETWORK NODE	Open Face Wall Pack	Cutoff Wall Pack	Barn Light	Canopy	M Series	AE Slim Area Light	PathMax Slim Bollards
NN-RTW							
CEA-RDB**							
NN-RDMPBXR							
NN-RDB							

*PIR requires line of sight and cannot not be used in products behind the lens. **Round nodes (NN-RD**) can be used with the CEA-RDB External Adapter

Additional Resources:

Visit www.maxlite.com/cmax-network-lighting-controls for how-to videos, FAQs and more!

Download the c-Max App



Technology Partner
SILVAIR

NETWORK PARTNERS



Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	110431	NN-RTPSW-SL	Network Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	105905	NN-RDMSW-SL	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Integral Nodes

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111148	NN-RTW-SL	Network Node Rectangular, White	Indoor	Bluetooth®, High Trim, Scenes, Schedules
	111149	NN-RDW-SL	Network Node Round Bronze Or White	Indoor	Bluetooth®, High Trim, Scenes, Schedules

Wall Switches

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111135	WNS1RK-W	Single Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming
	111136	WNS2RK-W	Double Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming, Scenes
	111137	WNS1DU-W-SL	Network Silvoir Dimmer Wireless Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming
	111139	WNS1PU-W-SL	Network Silvoir Dimmer Occupancy Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, PIR Motion Sensor
	111144	WNS4SU-W-SL	Network Silvoir Dimmer Wireless 4-Button Wall Controller	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, Scenes

Relays

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	110876	NPP-ZC20A-SL	120-277V Network Zone Controller 20A 0-10V	Indoor	Bluetooth®, High Trim, Scenes, Schedules, Plug Load

Ceiling Mounted Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111145	CNSL-PSW-SL**	Network Sensor 12V, Bluetooth®/ PIR Motion Sensor /Daylight Harvest, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

**May be paired with a 12V powerpack or could be powered directly with MaxLite CR fixtures





NETWORK PARTNERS

Technology Partner



Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	112428	NN-RTPSW-CA	Network Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	112430	NN-RDMSW-CA	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor/Outdoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	112432	NN-RDMPB-CA	Network Node Round, PIR Motion Sensor, Photocell, Bronze	Indoor/Outdoor	Bluetooth®, Motion Sensor (PIR), Photocell (on/off) High Trim, Scenes Schedules

Integral Nodes

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	112429	NN-RTW-CA	Network Node Rectangular, White	Indoor & Outdoor	Bluetooth®, High Trim, Scenes, Schedules
	112433	NN-RDB-CA	Network Node Round Bronze Or White	Indoor & Outdoor	Bluetooth®, High Trim, Scenes, Schedules
	112431	NN-RDW-CA			
	112634	NN-MGT-CA	Network Node Magnetic Translucent	Indoor	Bluetooth®, High Trim, Scenes, Schedules

Wall Switches

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111135	WNS1RK-W	Single Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming
	111136	WNS2RK-W	Double Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming, Scenes
	112434	WNS1DU-W-CA	Network Casambi Dimmer Wireless Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming
	112435	WNS1PU-W-CA	Network Casambi Dimmer Occupancy Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, PIR Motion Sensor
	112436	WNS4SU-W-CA	Network Casambi Dimmer Wireless 4-Button Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, Scenes

Relays

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	112642	NPP-ZC20A/V2-CA	120-277V Network Zone Controller 20A 0-10V	Indoor	Bluetooth®, High Trim, Scenes, Schedules, Plug Load

Ceiling Mounted Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	112427	CNSL-PSW-CA**	Network Sensor 12V, Bluetooth*/PIR Motion Sensor/Daylight Harvest, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

**May be paired with a 12V powerpack or could be powered directly with MaxLite CR fixtures. Maxlite has access to many other Casambi ready components/accessories not show on this page. Please consult with Maxlite for your project needs.





Pair c-Max Network Partner Nodes with Controls-Ready MaxLite products today, or in the future!



Patented vandal-resistant design with locking screw that secures sensor to fixture

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls.

Simply purchase any CR fixture and the required Controls Node and you're all set!

(See individual product datasheets for available controls options and ordering information)



INDOOR					
NETWORK NODE	RECESSED Flat Panels, FPR Retrofit, ArcMax Troffer, TRK Retrofit	LINEAR LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	Eco/Value High Bay	Linear High Bay	Magnetic Retrofit Bar Kit/Type C Kits/ Down Lights
NN-RTPSW-CA NN-RTPSW-SL					
NN-RTW-CA NN-RTW-SL					
CEA-RDW					
NN-RDMSW-CA NN-RDMSW-SL					
NN-RDW-CA NN-RDW-SL					
NN-MGT-CA NN-MGT-SL					

*PIR requires line of sight and cannot not be used in products behind the lens.

**To use NN-RDMSW-CA with the above linear and highbay products, the CEA-RDW External adapter also needs to be purchased separately

OUTDOOR							
NETWORK NODE	Open Face Wall Pack	Cutoff Wall Pack	Barn Light	Canopy	M Series	AE Slim Area Light	PathMax Slim Bollards
NN-RTW-CA NN-RTW-SL							
CEA-RDB**							
NN-RDMPB-CA NN-RDMPB-SL							
NN-RDB-CA NN-RDB-SL							

*PIR requires line of sight and cannot not be used in products behind the lens. **Round nodes (NN-RD***) can be used with the CEA-RDB External Adapter

Additional Resources: Visit www.maxlite.com/cmax-network-partners for how-to videos, FAQs and more!

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



1.9'	
MODEL NUMBER	HLS-155UF-CSCR HLS-155UF-CSCRTA
ORDER CODE	110409 110894
Input Wattage	155W
Voltage	120-277V
Delivered Lumens (lm)	23,400, 23,250
Efficacy (lm/W)	151, 150
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	4,000K/5,000K
Dimming Compatible	0-10V
Lumen Maintenance (L70)	≥100,000 hours
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



1.9'			
MODEL NUMBER	HLS-135WUF-CSCR HLS-135WUF-CSCRTA		
ORDER CODE	110701 110892		
Input Wattage	135W	155W	185W
Voltage	120-277V		
Delivered Lumens (lm)	20,790, 20,920	23,560, 23,710	27,750, 27,930
Efficacy (lm/W)	154, 155	152, 153	150, 151
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



2.6'			
MODEL NUMBER	HLS-200WUF-CSCR HLS-200WUF-CSCRTA		
ORDER CODE	1104011 110898		
Input Wattage	200W	230W	270W
Voltage	120-277V		
Delivered Lumens (lm)	30,800, 31,000	34,960, 35,190	40,500, 40,770
Efficacy (lm/W)	154, 155	152, 153	150, 151
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4,000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

BayMax™ HLS Series - Enhanced Linear Highbays



3.7'

MODEL NUMBER	HLS-270WUF-CSCR HLS-270WUF-CSCR TA		
ORDER CODE	1104012 110968		
Input Wattage	270W	340W	400W
Voltage	120-277V		
Delivered Lumens (lm)	41,580, 41,850	51,680, 52,020	60,000, 60,400
Efficacy (lm/W)	154, 155	152, 153	150, 151
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

CCTs Selectable:



HLE Series Value Linear Highbays



2.6'

MODEL NUMBER	HLE-200WUF-CS		
ORDER CODE	110860		
Input Wattage	200W	230W	270W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	30,000 lm	34,500 lm	40,500 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hrs		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

CCTs Selectable:



HLE Series Value Linear Highbays



3.7'

MODEL NUMBER	HLE-270WUF-CS		
ORDER CODE	110861		
Input Wattage	270W	340W	400W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	40,500 lm	51,000 lm	60,000 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hrs		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

CCTs Selectable:



HLE Series Value Linear Highbays



CCTs Selectable:



		1.4'		
MODEL NUMBER	HLE-100WUF-CS			
ORDER CODE	110858			
Input Wattage	100W	115W	135W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	15,000 lm	17,250 lm	20,250 lm	
Efficacy (lm/W)	150 lm/W	150 lm/W	150 lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hrs			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLE Series Value Linear Highbays



CCTs Selectable:



		1.9'		
MODEL NUMBER	HLE-135WUF-CS			
ORDER CODE	110859			
Input Wattage	135W	155W	185W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	20,250 lm	23,250 lm	27,750 lm	
Efficacy (lm/W)	150 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hrs			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLV Series - Linear Highbays



CCTs Selectable:



		1.0'		
MODEL NUMBER	HLV-080WUF-CSCR			
ORDER CODE	112528			
Input Wattage	80W	100W	120W	
Voltage	120-277V			
Delivered Lumens (lm)	13,100	15,800	18,400	
Efficacy (lm/W)	162	159	153	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K, 4,000K, 5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLV Series - Linear Highbays



CCTs Selectable:



		1.5'		
MODEL NUMBER	HLV-135WUF-CSCR			
ORDER CODE	112529			
Input Wattage	135W	165W	195W	
Voltage	120-277V			
Delivered Lumens (lm)	20,900	24,900	29,000	
Efficacy (lm/W)	155	151	146	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K, 4,000K, 5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLV Series - Linear Highbays



CCTs Selectable:



		2.0'		
MODEL NUMBER	HLV-220WUF-CSCR			
ORDER CODE	112530			
Input Wattage	220W	255W	290W	
Voltage	120-277V			
Delivered Lumens (lm)	34,000	38,500	42,300	
Efficacy (lm/W)	155	151	146	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K, 4,000K, 5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLV Series - Linear Highbays



CCTs Selectable:



		2.4'		
MODEL NUMBER	HLV-300WUF-CSCR			
ORDER CODE	112531			
Input Wattage	300W	350W	400W	
Voltage	120-277V			
Delivered Lumens (lm)	46,800	53,200	59,200	
Efficacy (lm/W)	156	152	148	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K, 4,000K, 5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			



BayMax™ BPHE3 Series Value Round Highbays



CCTs Selectable:



MODEL NUMBER	BPHE3-U090WCS		
ORDER CODE	110034		
Input Wattage	90W	120W	150W
Voltage	120-277V		
Delivered Lumens (lm)	121,50, 13,500, 12,600 lm	16,200, 18,000, 16,800 lm	21,700, 23,100, 21,900 lm
Efficacy (lm/W)	135, 150, 140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours based on 25°C		
LISTINGS	ETL, Wet, FCC, DLC Premium, IP65, NSF		

BayMax™ BPHE3 Series Value Round Highbays



CCTs Selectable:



MODEL NUMBER	BPHE3-U180WCS		
ORDER CODE	111106		
Input Wattage	180W	200W	240W
Voltage	120-277V		
Delivered Lumens (lm)	24,500, 27,000, 25,200 lm	27,000, 30,000, 28,000 lm	32,100, 35,100, 33,400 lm
Efficacy (lm/W)	135, 150, 140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours based on 25°C		
LISTINGS	ETL, Wet, FCC, DLC Premium, IP65, NSF		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV2U20WCSCR		
ORDER CODE	105606		
Input Wattage	20W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2,852/2,944/2,888 lm	3,445/3,661/3,544 lm	4,173/4,255/4,113 lm
Efficacy (lm/W)	142/149/144 lm/W	146/154/146 lm/W	143/146/142 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV4U23WCSCR		
ORDER CODE	105607		
Input Wattage	23W	35W	48W
Voltage	120-277V		
Delivered Lumens (lm)	3,429/3,483/3,430 lm	4,677/4,782/4,687 lm	6,429/6,609/6,342 lm
Efficacy (lm/W)	146/150/146 lm/W	142/149/143 lm/W	146/145/135 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV8U65WCS		
ORDER CODE	105687		
Input Wattage	65W	75W	90W
Voltage	120-277V		
Delivered Lumens (lm)	8,840/8,905/9,620 lm	9,975/10,050/10,125 lm	11,700/11,790/11,880 lm
Efficacy (lm/W)	136/137/148 lm/W	133/134/135 lm/W	130/131/132 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

VE Series - 4' Value Vapor Tight Fixtures



CCTs Selectable:



		4'		
MODEL NUMBER	VE-4U23WCS			
ORDER CODE	111226			
Input Wattage	23W	35W	47W	
Voltage	120-277V			
Delivered Lumens (lm)	3,200 lm	4,700 lm	6,240 lm	
Efficacy (lm/W)	150 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	cULus listed, FCC, Rohs Complaint. IP65, DLC			

VE Series - 8' Value Vapor Tight Fixtures



CCTs Selectable:



		8'		
MODEL NUMBER	VE-8U65WCS			
ORDER CODE	111227			
Input Wattage	60W	70W	85W	
Voltage	120-277V			
Delivered Lumens (lm)	8,800 lm	10,000 lm	11,700 lm	
Efficacy (lm/W)	155 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	cULus listed, FCC, Rohs Complaint. IP65, DLC			

LSU Series - 2' Enhanced Utility Wrap Fixtures



CCTs Selectable:



		LSU2U20WCSCR		
MODEL NUMBER	LSU2U20WCSCR			
ORDER CODE	105658			
Input Wattage	20W	25W	30W	
Voltage	120-277V			
Delivered Lumens (lm)	2,781/2,843/2,774 lm	3,292/3,398/3,285 lm	3,847/3,964/3,796 lm	
Efficacy (lm/W)	132/138/132 lm/W	131/138/130 lm/W	131/138/128 lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, FCC, DLC Premium			

LSU Series - 4' Enhanced Utility Wrap Fixtures



CCTs Selectable:



MODEL NUMBER	LSU4U23WCSCR		
ORDER CODE	105664		
Input Wattage	23W	35W	48W
Voltage	120-277V		
Delivered Lumens (lm)	3,408/3,432/3,456 lm	4,692/4,726/4,760 lm	6,070/6,472/6,366 lm
Efficacy (lm/W)	142/143/144 lm/W	138/139/140 lm/W	129/142/135 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

UE Series - 2' Value Utility Wrap Fixtures



CCTs Selectable:



	2'		
MODEL NUMBER	UE-2U20WCS		
ORDER CODE	111192		
Input Wattage	20W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2,700, 2,800, 2,700 lm	3,250, 3,500, 3,250 lm	3,900, 4,200, 3,900 lm
Efficacy (lm/W)	130 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

UE Series - 4' Value Utility Wrap Fixtures



CCTs Selectable:



	4'		
MODEL NUMBER	UE-4U23WCS		
ORDER CODE	111193		
Input Wattage	26W	34W	46W
Voltage	120-277V		
Delivered Lumens (lm)	3,600, 3,800, 3,600 lm	4,500, 4,800, 4,500 lm	6,000, 6,200, 6,000 lm
Efficacy (lm/W)	130 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

LS3 Series - 2' Enhanced Linear Strip Fixtures



2'



MODEL NUMBER	LS3-2U15WCSCR LS3-2U15WCSCRTA		
ORDER CODE	110524 110994		
Input Wattage	15W	20W	25W
Voltage	120-277V		
Delivered Lumens (lm)	2040, 2190, 2085	2800, 3080, 2940	3350, 3600, 3420
Efficacy (lm/W)	136, 146, 139	144, 154, 147	134, 144, 137
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium, DLC		

CCTs Selectable:



LS3 Series - 4' Enhanced Linear Strip Fixtures



4'



MODEL NUMBER	LS3-4U23WCSCR LS3-4U23WCSCRTA		
ORDER CODE	110525 110995		
Input Wattage	23W	34W	47W
Voltage	120-277V		
Delivered Lumens (lm)	3330, 3560, 3380	4690, 5030, 4760	6110, 6580, 6200
Efficacy (lm/W)	145, 155, 147	138, 148, 140	130, 140, 132
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium, DLC		

CCTs Selectable:



LS3 Series - 8' Enhanced Linear Strip Fixtures



8'



MODEL NUMBER	LS3-8U65WCSCR LS3-8U65WCSCRTA		
ORDER CODE	110526 110997		
Input Wattage	65W	75W	90W
Voltage	120-277V		
Delivered Lumens (lm)	9,230, 9880, 9360	10,500, 11,250, 10,570	11,970, 12,870, 12,150
Efficacy (lm/W)	142, 152, 144	140, 150, 141	133, 143, 135
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium, DLC		

CCTs Selectable:



LSE Series - 4' Value Linear Strip Fixtures



CCTs Selectable:



	4'		
MODEL NUMBER	LSE-4U34WCS		
ORDER CODE	111027		
Input Wattage	34W	38W	45W
Voltage	120-277V		
Delivered Lumens (lm)	4,620, 4,960, 4,690	5,050, 5,430, 5,130	5,850, 6,300, 5940
Efficacy (lm/W)	136, 146, 138	133, 143, 135	130, 140, 132
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC		

LSE Series - 8' Value Linear Strip Fixtures



CCTs Selectable:



	8'		
MODEL NUMBER	LSE-8U55WCS		
ORDER CODE	111022		
Input Wattage	55W	60W	65W
Voltage	120-277V		
Delivered Lumens (lm)	7,480, 8,030, 7590	7,980, 8,580, 8,100	8,450, 9,100, 8580
Efficacy (lm/W)	136, 146, 138	133, 143, 135	130, 140, 132
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC		

RS2 Series - 4', 8' Enhanced Linear Strip Retrofits



CCTs Selectable:



	4'	8'
MODEL NUMBER	RS2-4U23WCS CR	RS2-8U65WCS CR
ORDER CODE	109257	109258
Input Wattage	23W	65W
Voltage	120-277V	
Delivered Lumens (lm)	3,330 lm	8,710 lm
Efficacy (lm/W)	145 lm/w	134 lm/w
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3,500K/4,000K/5,000K	
Replacement	RS2-4LENS	RS2-8LENS
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	UL, Damp, FCC, DLC	



LED T8 Lamp Ready 4' Vapor Tights



MODEL NUMBER	LSV2XT8USE4806	LSV3XT8USE4806
ORDER CODE	74850	74851
Number of Lamps	2 x T8 LED	3 x T8 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Pages 95-99 for compatible T8 lamps


LED T8 Lamp Ready 4' Utility Wraps



MODEL NUMBER	LSU2XT8USE4806	LSU3XT8USE4806	LSU4XT8USE4812
ORDER CODE	75304	75305	14098811
Number of Lamps	2 x T8 LED	3 x T8 LED	4 x T8 LED
Voltage	120-277V		
Max Wattage	22W Per Lamp		
LISTINGS	UL (Damp Listed)		

See Pages 95-99 for compatible T8 lamps

LED T8 Lamp Ready 4' Linear Utility Strips



MODEL NUMBER	LSS1XT8USE4802	LSS2XT8USE4803
ORDER CODE	75302	75303
Number of Lamps	1 x T8 LED	2 x T8 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	22W Per Lamp
LISTINGS	UL (Damp Listed)	UL (Damp Listed)

See Pages 95-99 for compatible T8 lamps

LED T5 Lamp Ready 4' Utility Strip



MODEL NUMBER	LSS1XT5USE4802	LSS2XT5USE4803
ORDER CODE	14100561	14100562
Number of Lamps	1 x T5 LED	2 x T5 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Page 99 for compatible T5 lamps.

LED T8 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT8USE4810	BLHT6XT8USE4815	BLHT8XT8USE4820
ORDER CODE	75428	75429	75430
Number of Lamps	4 x T8 LED	6 x T8 LED	8 x T8 LED
Voltage	120-277V		
Max Wattage	22W Per Lamp		
LISTINGS	UL (Damp Listed)		

See Pages 95-99 for compatible T8 lamps

LED T5 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT5USE4810	BLHT6XT5USE4815
ORDER CODE	14099836	14099837
Number of Lamps	4 x T5 LED	6 x T5 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Page 99 for compatible T5 lamps.

LED T8 Lamp Ready 4' Retrofit Strip



MODEL NUMBER	RS-482XT8
ORDER CODE	107768
Number of Lamps	2 x T8 LED
Voltage	120-277V
Max Wattage	22W Per Lamp
LISTINGS	UL (Damp Listed)

See Pages 95-99 for compatible T8 lamps

L-MAX Linear 2' LED Luminaire



CCTs Selectable:



		2'			
MODEL NUMBER	LM-2UF10WCS LM-2UF10WCSB				
ORDER CODE	112739 112744				
Input Wattage	10W	12W	16W	20W	
Voltage	120-277V				
Delivered Lumens (lm)	1,100lm	1,320lm	1,760lm	2,200lm	
Efficacy (lm/W)	110 lm/W at 20W, 2700K				
Color Rendering Index (CRI)	≥90				
Color Temperature (CCT)	2700K/3000K/3,500K/4,000K/5,000K				
Dimming Compatible	0-10V, 10%-100%				
Lumen Maintenance (L70)	≥100,000 hours				
LISTINGS	UL listed, DLC, FCC				

Mounting Options for L-Max



Suspended Mount



T-Grid Suspended Mount



Surface Mount



Wall Mount



Recessed Mount

*Each mounting option would need it's respective mounting kits purchased separately

L-MAX Linear 8' LED Luminaire



CCTs Selectable:



		8'			
MODEL NUMBER	LM-8UF40WCS LM-8UF40WCSB				
ORDER CODE	112741 112746				
Input Wattage	40W	48W	64W	80W	
Voltage	120-277V				
Delivered Lumens (lm)	4,400lm	5,280lm	7,040lm	8,800lm	
Efficacy (lm/W)	110 lm/W at 80W, 2700K				
Color Rendering Index (CRI)	≥90				
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K				
Dimming Compatible	0-10V, 10%-100%				
Lumen Maintenance (L70)	≥100,000 hours				
LISTINGS	UL listed, DLC, FCC				

Available in 2', 4' and 8' lengths

Direct-Indirect Flux Ratio Adjustable


	Direct	Indirect
100%	100%	0%
70%	70%	30%
50%	50%	50%

Direct Only Direct-Indirect



Tool free connection
No wiring needed

L-MAX Linear 4' LED Luminaire




CCTs Selectable:




	4'			
MODEL NUMBER	LM-4UF20WCS LM-4UF20WCSB			
ORDER CODE	112740 112745			
Input Wattage	20W	24W	32W	40W
Voltage	120-277V			
Delivered Lumens (lm)	2,200lm	2,640lm	3,520lm	4,400lm
Efficacy (lm/W)	110 lm/W at 4sd0W, 2700K			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K			
Dimming Compatible	0-10V, 10%-100%			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL listed, DLC, FCC			


Illuminated Connection Accessories Available

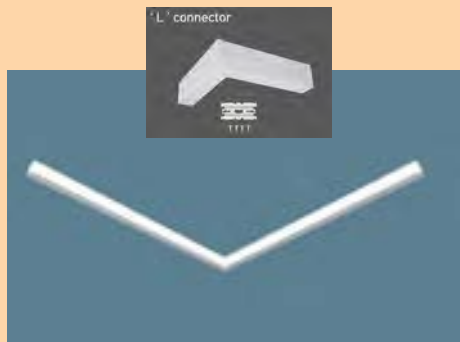

"L" Connection LM2-LCON

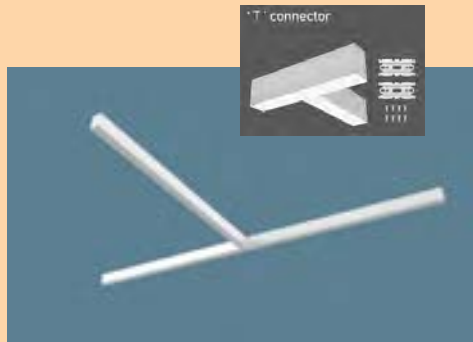

"T" Connection LM2-TCON

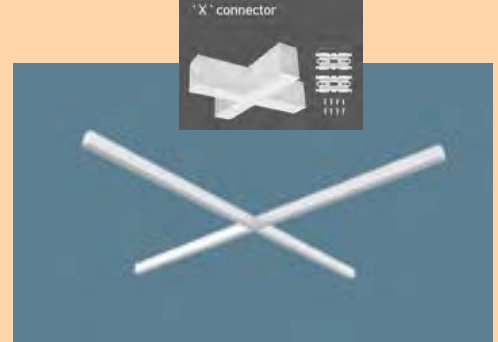

"X" Connection LM2-XCON

FlatMax™ MLFP G5 Series Enhanced Flat Panels 1' x 4'



CCTs Selectable:



	1' x 4'		
MODEL NUMBER	MLFP14G515WCSCRTA		
ORDER CODE	111084		
Input Wattage	15W	20W	25W
Voltage	120-277V		
Delivered Lumens (lm)	2,100	2,800	3,500
Efficacy (lm/W)	140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	cETLus, Damp, DLC Premium, FCC		

Surface mount and flange kits available.

FlatMax™ MLFP G5 Series Enhanced Flat Panels 2' x 2'



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	MLFP22G515WCSCR			MLFP22G513CSCR
ORDER CODE	111085			111283
Input Wattage	15W	20W	25W	13W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	2,100 lm	2,800 lm	3500 lm	1,820 lm
Efficacy (lm/W)	140 lm/W	140 lm/W	140 lm/W	140 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K			3,500K/4,000K/5,000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	≥100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available.

FlatMax™ MLFP G5 Series Enhanced Flat Panels 2' x 4'



CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	MLFP24G522WCSCR			MLFP24G520CSCR
ORDER CODE	111529			111284
Input Wattage	22W	30W	38W	20W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,080 lm	4,200 lm	5,320 lm	2,800 lm
Efficacy (lm/W)	140 lm/W	140 lm/W	140 lm/W	140 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K			3,500K/4,000K/5,000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	≥100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available.



CMMax™

LIGHTING CONTROLS

Simple, Versatile,
Future Ready
and Scalable
Technology!



Plug Into
Savings!

CMMax™ BC

BASIC LIGHTING CONTROLS

- Streamlined controls for essential needs
- Affordable in-fixture controls
- Commission via remote control



Learn More!



Point,
Click,
Group!

CMMax™ RF

EasyRF™ LIGHTING CONTROLS

- Groupable wireless controls
- Easy Commissioning - No app required
- Efficient, powerful, yet affordable



Learn More!



Tap Into
Value!



CMMax™ NC

NETWORK LIGHTING CONTROLS

- Bluetooth wireless NLC/LLC solution
- Commission devices without needing a gateway
- Extensive range of indoor & outdoor sensors/nodes



Learn More!



Enhanced
Networking!

SILVAIR
CASAMBI



CMMax™ NP

NETWORK PARTNERS

- Enhanced network solutions with leading technology partners
- Agnostic to technology and connectivity protocol
- Enable future IoT needs while meeting today's needs



Learn More!



MaxLite® www.maxlite.com/cmax

DLC Premium Value Flat Panels 1' x 4'



1' x 4'



MODEL NUMBER	MLFP14V15WCS MLFP14V15WCS/2PK		
ORDER CODE	111640 111643		
Input Wattage	15W	25W	35W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,115 lm	3,425 lm	4,655 lm
Efficacy (lm/W)	141 lm/W	137 lm/W	133 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL listed, FCC, Rohs Compliant, DLC Premium		

CCTs Selectable:



DLC Premium Value Flat Panels 2' x 2'



2' x 2'



MODEL NUMBER	MLFP22V15WCS MLMLFP22V15WCS/2PK		
ORDER CODE	111641 111644		
Input Wattage	15W	25W	35W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,115 lm	3,425 lm	4,655 lm
Efficacy (lm/W)	110 lm/w		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL listed, FCC, Rohs Compliant, DLC Premium		


CCTs Selectable:



DLC Premium Value Flat Panels 2' x 4'



2' x 4'

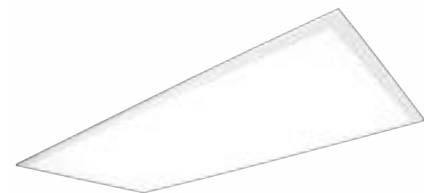

MODEL NUMBER	MLFP24V25WCS MLFP24V25WCS/2PK		
ORDER CODE	111642 111645		
Input Wattage	25W	35W	45W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,425 lm	4,690 lm	5,895 lm
Efficacy (lm/W)	110 lm/w		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL listed, FCC, Rohs Compliant, DLC Premium		

CCTs Available:





FlatMax High Lumen Controls Ready Flat Panel 2' x 2'



2' x 2'



CCTs Selectable:




MODEL NUMBER	MLFP22G530WCSCR MLFP22G530WCSCR/2PK
ORDER CODE	111544 111542
Input Wattage	30W, 40W, 50W
Voltage	120-277V AC 50/60Hz
Delivered Lumens (lm)	3,750 5,000 6,250 lm
Efficacy (lm/w)	125 lm/w
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K
Dimming Compatible	0-10V
Lumen Maintenance (L70)	≥100,000 hours
LISTINGS	ETLus listed, FCC, RoHs Compliant, DLC Premium

FlatMax High Lumen Controls Ready Flat Panel 2' x 4'



2' x 4'

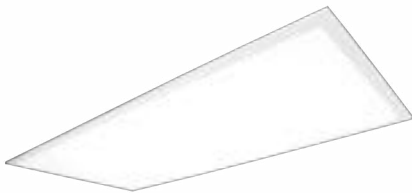

CCTs Available:



MODEL NUMBER	MLFP24G540WCSCR MLFP24G540WCSCR/2PK
ORDER CODE	111545 111543
Input Wattage	40W, 50W, 60W
Voltage	120-277V AC 50/60Hz
Delivered Lumens (lm)	5,000 6,250 7,500 lm
Efficacy (lm/w)	125 lm/w
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K
Dimming Compatible	0-10V
Lumen Maintenance (L70)	≥100,000 hours
LISTINGS	ETLus listed, FCC, RoHs Compliant, DLC Premium

ArcMax™ MLVT G2 Series Enhanced Troffers 1' x 4'



CCTs Selectable:



	1.4'		
MODEL NUMBER	MLVT14D13WCSCR MLVT14D13WCSCRTA		
ORDER CODE	110766 111484		
Input Wattage	13W	20W	26W
Voltage	120-277V		
Delivered Lumens (lm)	1,950 lm	3,000 lm	3,900 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, DLC, FCC		

ArcMax™ MLVT G2 Series Enhanced Troffers 2' x 2'



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	MLVT22D13WCSCR MLVT22D13WCSCRTA			MLVT22D13CSCR
ORDER CODE	110767 110988			110769
Input Wattage	13W	20W	26W	13W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	1,950 lm	3,000 lm	3,900 lm	1,950 lm
Efficacy (lm/W)	150 lm/W			150 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K			3,500K/4,000K/5,000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	UL, Damp, DLC, FCC			UL, Damp, DLC, FCC

ArcMax™ MLVT G2 Series Enhanced Troffers 2' x 4'



CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	MLVT24D22WCSCR MLVT24D22WCSCRTA			MLVT24D19CSCR
ORDER CODE	110768 110992			110991
Input Wattage	22W	28W	34W	19W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	3,300 lm	4,200 lm	5,100 lm	2,850 lm
Efficacy (lm/W)	150 lm/W			150 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K			3,500K/4,000K/5,000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	UL, Damp, DLC, FCC			UL, Damp, DLC, FCC



TV Series Value Troffers 2' x 2'



CCTs Selectable:



	2' x 2'		
MODEL NUMBER	TV22D21WCS2P		
ORDER CODE	111015		
Input Wattage	21W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2,625 lm	3,125 lm	3,750 lm
Efficacy (lm/W)	125 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, DLC Premium, FCC		

TV Series Value Troffers 2' x 4'



CCTs Selectable:



	2' x 4'		
MODEL NUMBER	TV24D36WCS2P		
ORDER CODE	111016		
Input Wattage	36W	40W	45W
Voltage	120-277V		
Delivered Lumens (lm)	4,500 lm	5,000 lm	5,625 lm
Efficacy (lm/W)	125 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, DLC Premium, FCC		

Surface mount and flange kits available.

FPR Series - Enhanced Panel Retrofit Kit 1' x 4'



CCTs Selectable:



MODEL NUMBER	1' x 4'		
	FPR14D15WCSCRTA FPR14D15WCSCR/2PKTA		
ORDER CODE	110998 110999		
Input Wattage	15W	20W	25W
Voltage	120-277V		
Delivered Lumens (lm)	2,100 lm	2,800 lm	3,500 lm
Efficacy (lm/W)	lm/W	lm/W	lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	cETLus, Damp, DLC Premium, FCC		

Factory default CCT is 4000K. Factory default is lowest wattage at 4000K

FPR Series - Enhanced Panel Retrofit Kit 2' x 2'



CCTs Selectable:



MODEL NUMBER	2' x 2'		2' x 2'
	FPR22D15WCSCR FPR22D15WCSCR/2PKTA		FPR22D13CSCR
ORDER CODE	111002 111003		110512
Input Wattage	15W	20W	25W
Voltage	120-277V		120-277V
Delivered Lumens (lm)	2,100 lm	2,800 lm	3,500 lm
Efficacy (lm/W)	140 lm/W		140lm/W
Color Rendering Index (CRI)	≥80		≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K		3,500K/4,000K/5,000K
Dimming Compatible	0-10V		0-10V
Lumen Maintenance (L70)	≥100,000 hours		100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC		cETLus, Damp, DLC Premium, FCC

Factory default CCT is 4000K. Factory default is lowest wattage at 4000K

FPR Series - Enhanced Panel Retrofit Kit 2' x 4'



CCTs Selectable:



MODEL NUMBER	2' x 4'		2' x 4'
	FPR24D22WCSCRTA FPR24D22WCSCR/2PKTA		FPR24D20CSCR
ORDER CODE	111006 111007		111005
Input Wattage	22W	30W	38W
Voltage	120-277V		120-277V
Delivered Lumens (lm)	3,080 lm	4,200 lm	5,320 lm
Efficacy (lm/W)	140 lm/W		140 lm/W
Color Rendering Index (CRI)	≥80		≥80
Color Temperature (CCT)	3,500K/4,000K/5,000K		3,500K/4,000K/5,000K
Dimming Compatible	0-10V		0-10V
Lumen Maintenance (L70)	≥100,000 hours		≥100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC		cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available
Factory default CCT is 4000K. Factory default is lowest wattage at 4000K

TRK G2 Series - Enhanced Troffer Retrofit Kit 1' x 4'



CCTs Selectable:



	1' x 4'		
MODEL NUMBER	TRK14D13WCSCR TRK14D13WCSCRTA		
ORDER CODE	110382 110974		
Input Wattage	13W	20W	26W
Voltage	120-277V, 50/60 Hz		
Delivered Lumens (lm)	2,000, 2,060, 2,020	3,040, 3,140, 3,080	3,900, 4,030, 3,950
Efficacy (lm/W)	154, 159, 156	152, 157, 154	150, 155, 152
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K/4,000K/5,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, DLC, FCC		

* Fixtures are set to lowest wattage and 4000K as default factory setting

TRK G2 Series - Enhanced Troffer Retrofit Kit 2' x 2'



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	TRK22D13WCSCR TRK22D13WCSCRTA			TRK22D13CSCR
ORDER CODE	110383 110978			111199
Input Wattage	13W	20W	26W	13W
Voltage	120-277V, 50/60 Hz			120-277V, 50/60 Hz
Delivered Lumens (lm)	1,970, 2,010, 1,980 lm	3,020, 3,080, 3,040 lm	3,900, 3,970, 3,920 lm	2,000, 2,010, 2,000 lm
Efficacy (lm/W)	152, 155, 153 lm/W	151, 154, 152 lm/W	150, 153, 151 lm/W	150, 155, 152 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

* Fixtures are set to lowest wattage and 4000K as default factory setting

TRK G2 Series - Enhanced Troffer Retrofit Kit 2' x 4'



CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	TRK24D22WCSCR TRK24D22WCSCRTA			TRK24D19CSCR
ORDER CODE	110384 110982			110798
Input Wattage	22W	28W	34W	19W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	3,380, 3,490, 3,430 lm	4,250, 4,390, 4,310 lm	5,100, 5,270, 5,160 lm	2,850, 2,940, 2,880 lm
Efficacy (lm/W)	154, 159, 156 lm/W	152, 157, 154 lm/W	150, 155, 152 lm/W	150, 155, 152 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

* Fixtures are set to lowest wattage and 4000K as default factory setting



TRKE Series - Value Troffer Retrofit Kit 2' x 2'



CCTs Selectable:



		2' x 2'		
MODEL NUMBER	TRKE22D20WCS2P			
ORDER CODE	11113			
Input Wattage	20W	25W	30W	
Voltage	120-277V			
Delivered Lumens (lm)	lm	lm	lm	
Efficacy (lm/W)	lm/W	lm/W	lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

Surface mount and flange kits available.

TRKE Series - Value Troffer Retrofit Kit 2' x 4'



CCTs Selectable:



		2' x 4'		
MODEL NUMBER	TRKE24D25WCS2P			
ORDER CODE	11114			
Input Wattage	25W	30W	36W	
Voltage	120-277V			
Delivered Lumens (lm)	lm	lm	lm	
Efficacy (lm/W)	lm/W	lm/W	lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K/4,000K/5,000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

Surface mount and flange kits available.



MRBK Series - Value Magnetic Bar Retrofits Kits



2'

MODEL NUMBER	MRBK-21FL-40	MRBK-21LFM-40	MRBK-21LFH-40
ORDER CODE	106951	106955	106959
Input Wattage	9W	10W	12W
Voltage		120-277V	
Delivered Lumens (lm)	1,125 lm	1,330 lm	1,575 lm
Efficacy (lm/W)		130 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		4,000K	
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		≥50,000 hours	
LISTINGS	UL, Damp, DLC Premium, FCC		



CCTs Available:

4000K



MRBK Series - Value Magnetic Bar Retrofits Kits



4'

MODEL NUMBER	MRBK-41FL-40	MRBK-41LFM-40	MRBK-41LFH-40
ORDER CODE	107523	107527	107531
Input Wattage	9W	14W	18W
Voltage		120-277V	
Delivered Lumens (lm)	1,625 lm	1,921 lm	2,275 lm
Efficacy (lm/W)		130 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		4,000K	
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		≥50,000 hours	
LISTINGS	UL, Damp, DLC Premium, FCC		



CCTs Available:

4000K





Recessed Architectural Downlights



CCTs Selectable:



MODEL NUMBER	RADM-12WCS	RADM-18WCS	RADM-30WCS
ORDER CODE	112673	112674	112675
Input Wattage	12/16/20W	18/24/30W	30/40/50W
Voltage	120-277V, 120V		
Delivered Lumens (lm)	1,150/1500/1800 lm	1,900/2,400/2,800 lm	2,900/3,800/4,500 lm
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K/3000K/3,500K/4,000K/5,000K (Default CCT: 2,700K)		
Power Factor	≥0.9		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	ETL Listed & Classified, ENERGY STAR V1.0		


Select the Reflector



ROUND SILVER REFLECTOR & WHITE TRIM



ROUND WHITE REFLECTOR & WHITE TRIM

FAMILY	TYPE	SIZE	REFLECTOR FINISH	FLANGE FINISH	SOURCE
RAD= Recessed Architectural Downlight Reflector 	R= Round Downlight	4= 4" reflector** 6= 6" reflector 8= 8" reflector 10= 10" reflector	M= Matte Silver W= White	W= White	[BLANK]= Blank TA= TAA Compliant
	W= Round Wall Wash	6= 6" reflector 8= 8" reflector 10= 10" reflector***			

Accessories Table (Sold Separately)



ORDER CODE	MODEL NUMBER	DESCRIPTION
109999	CDFK-4-10IN/2PK	COMMERCIAL DOWNLIGHT FRAME KIT, NEW CONSTRUCTION, 4", 6", 8" & 10" SIZE - 2 PACK
108566	EBUUP17015N200B	EMERGENCY INVERTER, 15W, 120-347VAC, CEC COMPLIANT, FIELD INSTALLABLE

RCF Series - 4", 6" Value Triac Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF4T06WCS	RCF6T06WCS	RCF6T10WCS
ORDER CODE	111177	111178	110739
Input Wattage	6W/7W/8W	6W/7W/8W	10W/18W/23W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,700k	500/585/675	900/1,620/2,100
	3,000K	500/585/675	900/1,620/2,100
	3,500K	500/590/680	910/1,650/2,150
	4,000K	500/600/700	910/1,750/2,300
	5000K	500/600/700	910/1,750/2,300
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 8", 10" Value Triac Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF8T05WCS	RCF8T18WCS	RCF10T28WCS
ORDER CODE	110740	110741	110742
Input Wattage	5W/8W/11W	18W/27W/34W	28W/35W/42W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,700k	450/750/1,000	2,700/3,400/4,100
	3,000K	450/750/1,000	2,750/3,450/4,150
	3,500K	450/760/1,050	1,800/2,700/3,400
	4,000K	450/760/1,100	1,800/2,700/3,400
	5,000K	450/760/1,100	1,800/2,700/3,400
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 4", 6" Value 0-10V Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF4V06WCS	RCF6V06WCS	RCF6V10WCS
ORDER CODE	111179	111180	110745
Input Wattage	6W/7W/8W	6W/7W/8W	10W/18W/23W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,700k	500/585/675	900/1,620/2,050
	3,000K	500/585/675	900/1,620/2,100
	3,500K	500/590/690	510/640/730
	4,000K	500/590/700	510/640/730
	5,000K	500/590/700	510/640/730
Efficacy (lm/W)		≥90 lm/W	
Color Rendering Index (CRI)		90	
Color Temperature (CCT)		2,700K/3,000K/3,500K/4,000K/5,000K	
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	eETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 8", 10" Value 0-10V Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF8V05WCS	RCF8V18WCS	RCF10V28WCS
ORDER CODE	110746	110747	110748
Input Wattage	5W/8W/11W	18W/27W/34W	28W/35W/42W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2,700k	450/750/1,000	1,700/2,600/3,300
	3,000K	450/750/1,000	1,750/2,650/3,350
	3,500K	450/760/1,050	1,800/2,700/3,400
	4,000K	450/760/1,100	1,800/2,700/3,400
	5,000K	450/760/1,100	1,800/2,700/3,400
Efficacy (lm/W)		≥90 lm/W	
Color Rendering Index (CRI)		90	
Color Temperature (CCT)		2,700K/3,000K/3,500K/4,000K/5,000K	
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	eETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 6", 8" 03-10V Multi-Mode Dimming Commercial Downlights



	6"	8"
MODEL NUMBER	RCF6M9WCS	RCF8M16WCS
ORDER CODE	111696	111689
Input Wattage	10W/17W/21W	16W/24W/30W
Voltage	120-277V	
Delivered Lumens (lm)	1,000/1,800/2,300 lm	1,800/2,700/3,400 lm
Efficacy (lm/W)	87 lm/W	97 lm/W
Color Rendering Index (CRI)	≥90	
Color Temperature (CCT)	2,700/3,000K/3,500K/4,000K/5,000K (4,000K Default)	
Dimming Compatible	See Compatible Dimmers List	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	RoHS compliant; no mercury, Wet Locations, IC rated	

All products are set at 4000K and to the lowest wattage

CCTs Selectable:



RCF - 8" 0-10V Dimming Commercial Downlights



	8"		
MODEL NUMBER	RCF832WCSDW		
ORDER CODE	108389		
Input Wattage	32W	42W	52W
Voltage	120-347V	120-347V	120-347V
Delivered Lumens (lm)	3,200 lm	4,000 lm	5,000 lm
Efficacy (lm/W)	100 lm/W	100 lm/W	95 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	3,000K/3,500K/4,000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC		

CCTs Selectable:



Fire Rated Slim Baffle Downlights



	FSDL4T11CSWTA	FSDL6T15CSWTA	FSDL8T19CSWTA
MODEL NUMBER	FSDL4T11CSWTA	FSDL6T15CSWTA	FSDL8T19CSWTA
ORDER CODE	111857	111858	111859
Input Wattage	11W	15W	19W
Voltage	120V, 60Hz		
Delivered Lumens (lm)	900 lm	1,250 lm	1,600 lm
Efficacy (lm/W)	82 lm/w	83 lm/w	84 lm/w
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K (Default is 4,000K)		
Beam Angle	110°		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	ULus, FCC, Title 24 Compliant, JA8, IC Rated, Airtight		

CCTs Selectable:



Litebars



CCTs Available:



	6"	12"	24"
MODEL NUMBER	LB0627	LB1227	LB2427
ORDER CODE	1409841	1409846	1409851
Input Wattage	2W	4W	8W
Voltage	120V		
Delivered Lumens (lm)	148 lm	341 lm	657 lm
Efficacy (lm/W)	70 lm/W	79 lm/W	84 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2,700K, 3,500K, 4,000K, 5,000K		
Dimming Compatible	Triac, ELV		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	cULus, Damp, Energy Star, T20		

Litebars



CCTs Available:



	36"	48"
MODEL NUMBER	LB3627	LB4827
ORDER CODE	1409866	1409856
Input Wattage	12W	16W
Voltage	120V	
Delivered Lumens (lm)	987 lm	1,330 lm
Efficacy (lm/W)	81 lm/W	83 lm/W
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	2,700K, 3,500K, 4,000K, 5,000K	
Dimming Compatible	Triac, ELV	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	cULus, Damp, Energy Star, T20	

Optional Accessories:



LB-BBC - 14098894
Bar-Bar Connector



LB-BBCF4 - 14098897
Bar-Bar Connector, Flexible 4"



LB-BBCF12 - 14098898
Bar-Bar Connector, Flexible 12"



LB-BBCF40 - 14098899
Bar-Bar Connector, Flexible 40"



LB-BBCR - 14098896
Bar-Bar Connector, 90 deg right



LB-BBCL - 14098895
Bar-Bar Connector, 90 deg left



LB-MB - 14098902
Mounting Bracket (2pcs per)



LB-PMB - 14098903
Pivot Mounting Bracket (2pcs per)



LB-MMB - 14098904
Magnetic Mounting Bracket (2pcs per)



LB-CBOX - 14098906
Connector Box



LB-DBOX - 14098905
Distribution Box



LB-HWC70 - 14098900
70" Hardware Cord



LB-PC48 - 14098901
40" Plug Cord





LED Shop Light Single Tube




CCTs Available:

5000K



	4'
MODEL NUMBER	SL3-4823-50
ORDER CODE	112121
Input Wattage	23W
Voltage	120-277V
Delivered Lumens (lm)	2,400 lm
Efficacy (lm/W)	104 lm/W
Color Rendering Index (CRI)	≥90
Color Temperature (CCT)	5,000K
Replacement	1x 32WT8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	≥50,000 hours
LISTINGS	ETLus

LED Shop Light Two Tubes

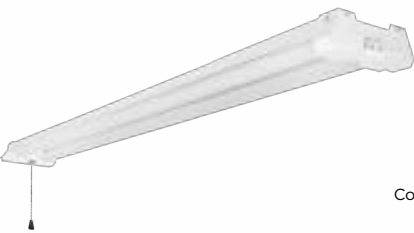

CCTs Available:

5000K



	4'
MODEL NUMBER	SL3-4843-50
ORDER CODE	112119
Input Wattage	43W
Voltage	120-277V
Delivered Lumens (lm)	4,500 lm
Efficacy (lm/W)	102 lm/W
Color Rendering Index (CRI)	≥70
Color Temperature (CCT)	5,000K
Replacement	2 x 32W T8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	≥50,000 hours
LISTINGS	ETLus

Residential Recessed Baffle Downlights



CCTs Selectable:



	4"	6"
MODEL NUMBER	RRBD-4R7.5T9CS-W	RRBD-6R9.5T9CS-W
ORDER CODE	112187	112188
Input Wattage	7.5W	9.5W
Voltage	120V, 60Hz	
Delivered Lumens (lm)	700 lm	900 lm
Efficacy (lm/W)	87.5 lm/W	94 lm/W
Color Rendering Index (CRI)	≥90	
Color Temperature (CCT)	2,700/3,000K/3,500K/4,000K/5,000K (3,000K Default)	
Dimming	TRIAC Dimming Range: 10%-100%	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	ENERGY STAR, ULus, Title 24 Compliant, JA8	

Adjustable Residential Retrofit Downlights w/Selectable CCT



CCTs Selectable:



	4"	5" 6"
MODEL NUMBER	RRA4089CSW*	RRA6109CSW
ORDER CODE	105670	105652
Input Wattage	8W	10W
Voltage	120V	
Delivered Lumens (lm)	700 lm	900 lm
Efficacy (lm/W)	87.5 lm/W	90 lm/W
Color Rendering Index (CRI)	90	
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K	
Replacement	60W INC	75W INC
Dimming Compatible	Triac	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	

*4" is Special Order only

Slim Smooth/Baffle Round Downlight



CCTs Selectable:



	4"	6"	8"
MODEL NUMBER	SSRD-4R10.5T9CS-W	SSRD-6R13T9CS-W	SSRD-8R23T9CS-W
ORDER CODE	112155	112156	112158
Input Wattage	10.5W	13W	23W
Voltage	120V, 60Hz		
Delivered Lumens (lm)	870 lm	1,100 lm	1,900 lm
Efficacy (lm/W)	83 lm/w	84 lm/w	82 lm/w
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K (Default is 3,000K)		
Beam Angle	110°		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	ENERGY STAR, ULus, Title 24 Compliant, JA8, IC Rated, Airtight		

Disc Lights



	4"	6"
MODEL NUMBER	DSKL-4R10T9CS-W	DSKL-6R15T9CS-W
ORDER CODE	112191	112192
Input Wattage	10W	15W
Voltage	120V, 60Hz	
Delivered Lumens (lm)	850 lm	1,230 lm
Efficacy (lm/W)	83 lm/W	82 lm/W
Color Rendering Index (CRI)	≥90	
Color Temperature (CCT)	2,700/3,000K/3,500K/4,000K/5,000K (3000K Default)	
Dimming	TRIAC Dimming Range: 10%-100%	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	ENERGY STAR, ULus, Title 24 Compliant	

CCTs Selectable:



Flush Mount Ceiling Fixture Architectural Design



	12"	14"	16"
MODEL NUMBER	FMA12T08WCSN	FMA14T10WCSN	FMA16T12WCSN
ORDER CODE	111845	111846	111847
Input Wattage	8/12/16W	110/15/20W	12/18/24W
Equivalency	100W INC	125W INC	150W INC
Delivered Lumens (lm)	300 lm		
Efficacy (lm/W)	75 lm/W	75 lm/W	83 lm/W
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K (Default is 3,000K)		
Dimming	TRIAC Dimming Range: 10%-100%		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	ETLus, Title 24 Compliant, JA8		

CCTs Selectable:



Flush Mount Ceiling Fixture - Puff Design



	11"	13"	15"
MODEL NUMBER	FMP11T08WCSW	FMP13T10WCSW	FMP15T12WCSW
ORDER CODE	111839	111840	111841
Input Wattage	8/12/16W	110/15/20W	12/18/24W
Equivalency	100W INC	125W INC	150W INC
Delivered Lumens (lm)	300 lm		
Efficacy (lm/W)	75 lm/W	75 lm/W	83 lm/W
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K (Default is 3,000K)		
Dimming	TRIAC Dimming Range: 10%-100%		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	ETLus, Title 24 Compliant, JA8		

CCTs Selectable:



Outdoor Wall Lantern Contemporary



W/ PHOTOCELL AND PHOTOCELL COVER CAP



MODEL NUMBER	OWL-TBK-E26
ORDER CODE	113332
Number of Lamps	One bulb rated 13W maximum
Voltage	120VAC
Source Lumens (lm)	Determined by Lamp
Housing	Metal
Lens	Clear Glass
Max Wattage	Determined by Lamp
LISTINGS	ETL/FCC

Outdoor Wall Lantern Contemporary with DTD



W/ PHOTOCELL AND PHOTOCELL COVER CAP



MODEL NUMBER	OWL-TBK-E26DTD
ORDER CODE	113430
Number of Lamps	One bulb rated 13W maximum
Voltage	120VAC
Source Lumens (lm)	Determined by Lamp
Housing	Metal
Lens	Clear Glass
Max Wattage	Determined by Lamp
LISTINGS	ETL/FCC

Outdoor Wall Lantern Harbor Glow



MODEL NUMBER	OWL-DJJBK-E26
ORDER CODE	113367
Number of Lamps	One bulb max rated 9W
Voltage	120VAC
Source Lumens (lm)	Determined by Lamp
Housing	Metal
Lens	Clear Glass
Max Wattage	Determined by Lamp
LISTINGS	ETL/FCC

Outdoor Wall Lantern Classic



MODEL NUMBER	OWL-FBBK-E26
ORDER CODE	code 113376
Number of Lamps	One bulb rated 13W maximum
Voltage	120VAC
Source Lumens (lm)	
Housing	Metal
Lens	Clear Glass
Max Wattage	
LISTINGS	ETL/FCC

Outdoor Wall Lantern Modern Hearth



MODEL NUMBER	OWL-FCBK-E26
ORDER CODE	113333
Number of Lamps	One bulb rated 13W maximum
Voltage	120VAC
Source Lumens (lm)	
Housing	Metal
Lens	Clear Glass
Max Wattage	
LISTINGS	ETL/FCC

Outdoor Wall Lantern Modern Craftsman Style



MODEL NUMBER	OWL-MBBK-E26
ORDER CODE	113409
Number of Lamps	One bulb rated 13W maximum
Voltage	120VAC
Source Lumens (lm)	
Housing	Metal
Lens	Frosted Glass Panels
Max Wattage	
LISTINGS	ETL/FCC

PurAirMax Tabletop Air Purifier



MODEL NUMBER	AP215SF3B
ORDER CODE	111578
Input Wattage	9W
Voltage	120V AC, 60Hz
Rated Power	High Speed: 24W, Middle Speed: 10W, Low Speed: 3.5W, Sleep Mode: 3.5W
Rotate Speed	High Speed: 2,200 rpm, Middle Speed: 1,600 rpm, Low Speed: 1,000 rpm, Sleep Mode: 1000 rpm
Noise Level	Max. 59 dBA
Timer Function	2, 4, 6, 8 hours
Filter Life	2,160 hours
Net Weight	6.3 lbs
LISTINGS	ETLus Listed, ES, FCC, Proposition 65

LED Garage Light 4 Panel



MODEL NUMBER	GL-054UB50
ORDER CODE	109540
Nominal Wattage	54W
Voltage	120V
Delivered Lumens (lm)	5,400 lm
Efficacy (lm/W)	≥100 lm/W
Color Rendering Index (CRI)	83
Color Temperature (CCT)	5000K
Operating Temperature	-4 - 104°F (-20-40°C)
Power Factor	≥0.9
Lumen Maintenance (L70)	≥20,000 hours
LISTINGS	ETLus Listed, Damp, FCC

CCTs Available:


5000K



Smart Wall Plugs, Plug Strips



MODEL NUMBER	WP-SMTR	IWP-SMTR-G2	OP-SMTR
ORDER CODE	110369	111993	111994

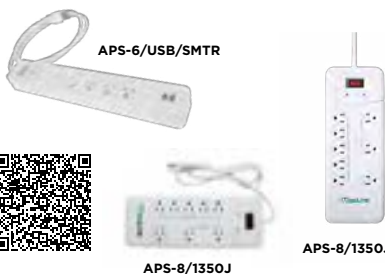

MODEL NUMBER	APS-6/USB/SMTR	APS-8/1350J-G2	APS-8/1350J
ORDER CODE	110370	111996	103714



LED Slim Desk Lamp



CCTs Available:



3000K

	Black	White	Blue
MODEL NUMBER	ML7LA4S30BK	ML7LA4S30WH	ML7LA4S30BL
ORDER CODE	105355	105354	105356
Input Wattage		4W	
Input Voltage		120-240V	
Delivered Lumens (lm)		225 lm	
Efficacy (lm/W)		56.3 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)		3,000K	
Environment		Dry locations, Indoor Only	
Lumen Maintenance (L70)		≥25,000 hours	
LISTINGS		cETL, FCC	

LED Slim Desk Lamp



CCTs Available:



3000K

	Green	Pink	Burgundy
MODEL NUMBER	ML7LA4S30GR	ML7LA4S30PK	ML7LA4S30BU
ORDER CODE	105358	105359	105357
Input Wattage		4W	
Input Voltage		120-240V	
Delivered Lumens (lm)		225 lm	
Efficacy (lm/W)		56.3 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)		3,000K	
Environment		Dry locations, Indoor Only	
Lumen Maintenance (L70)		≥25,000 hours	
LISTINGS		cETL, FCC	

MaxLite Home™

Re-Inventing Residential


MaxLite has re-invented its residential line of products with multiple energy efficient products that fit every corner of the house. Along with its ENERGYSTAR lamps and lighting fixtures MaxLite has launched its very popular line of air purifiers and smart power strips and plugs. The MaxLite Home line of products provides energy efficient reliability at a budget friendly price for both single family and multi-family residences.



Learn More at:
www.maxlite.com/maxlite-home



M Series™ - Area Fixtures

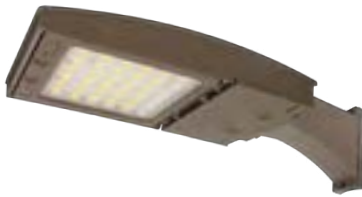

CCTs Selectable



MODEL NUMBER	M30UC4W-WCSBVCR	M42UC4W-CSBACR	M55UC5S-WCSBACR	M75UC3M-WCSBXCR
ORDER CODE	113060	113411	112968	112448
Input Wattage	15/22/30W	42W	30/42/55W	42/55/75W
Voltage	120-277V		120-277V (277-480V option)	
Delivered Lumens (lm)	2,150 - 5,100 lms	5,540 - 7,130 lms	7,390 - 8,860 lms	9,830 - 11,760 lms
Efficacy (lm/W)	144 - 180 lm/W	132 - 177 lm/W	132 - 177 lm/W	133 - 179 lm/W
Color Rendering Index (CRI)	≥70			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	50W	125W	150W	200W
Controls	Controls Ready for c-Max, Twistlock receptacle option			
Lumen Maintenance (L70)	≥100,000 hours			
Mounting	Straight (A) or Flexible (F) Arm or Adjustable Slip Fitter (K) Available			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

6 Changeable/rotatable lenses available, see literature and website for individual lenses and IES files

M Series™ - Area Fixtures



CCTs Selectable:



MODEL NUMBER	M100UC3M-WCSBXCR	M125UC3M-CSBFCR	M150UC3M-WCSBXCR
ORDER CODE	112372	113105	112373
Input Wattage	55/75/100W	125W	100/125/150W
Voltage	120-277V (277-480V option)		
Delivered Lumens (lm)*	14,420 - 16,940 lms	16,270 - 21,060 lms	19,200 - 23,200 lms
Efficacy (lm/W)	146 - 189 lm/W	130 - 176 lm/W	131 - 176 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	250W	320/350W	400W
Controls	Controls Ready for c-Max, Twistlock receptacle option		
Lumen Maintenance (L70)	≥100,000 hrs		
Mounting	Straight (A) or Flexible (F) Arm or Adjustable Slip Fitter (K) Available		
LISTINGS	UL, DLC Premium, ANSI 3G rated		

6 Changeable/rotatable lenses available, see literature and website for individual lenses and IES files

M Series™ - Area Fixtures



CCTs Selectable:



MODEL NUMBER	M200UC3M-CSBKCR	M250UC4W-CSBFCR	M300UC3M-WCSBXCR
ORDER CODE	113129	113139	112374
Input Wattage	200W	250W	200/250/300W
Voltage	120-277V (277-480V option)		
Delivered Lumens (lm)	28,260 - 33,080 lms	31,800 - 41,500 lms	37,500 - 45,710 lms
Efficacy (lm/W)	145 - 187 lm/W	131 - 180 lm/W	127 - 174 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	750W	750/1,000W	1,000W
Controls	Controls Ready for c-Max, Twistlock receptacle option		
Lumen Maintenance (L70)	≥100,000 hrs		
Mounting	Straight (A) or Flexible (F) Arm or Adjustable Slip Fitter (K) Available		
LISTINGS	UL, DLC Premium, ANSI 3G rated		

6 Changeable/rotatable lenses available, see literature and website for individual lenses and IES files

AE Switch Manual Changeable (CCT, Wattage & Distribution)



CCTs Selectable



450W dedicated CCT



MODEL NUMBER	AE100UMC-WCSBXCR	AE150UMC-WCSBXCR	AE200UMC-WCSBXCR	AE300UMC-WCSBXCR
ORDER CODE	112507	112508	112509	112510
Input Wattage	75/85/100W	100/125/150W	200W	200/250/300W
Voltage	120-277V (277-480V option)			
Delivered Lumens (lm)	10,950 - 16,550 lms	15,260 - 23,030 lms	21,360 - 30,090 lms	28,800 - 45,670 lms
Efficacy (lm/W)	146 - 168 lm/W	145 - 166 lm/W	146 - 161 lm/W	146 - 163 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	250W	400W	750W	1,000W
Controls	Controls Ready for c-Max, Twistlock receptacle option			
Lumen Maintenance (L70)	≥100,000 +hrs			
Mounting	Straight (A) or Flexible (F) Arm or Adjustable Slip Fitter (K) or Trunnion (T) Available			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

One lens with choice between Type III, IV or V using a toggle switch, back light shield and visor accessories available

AE Switch Remote Control (Changeable CCT/Distribution from the Ground)



CCTs Selectable



Ability to change CCT and Distribution from the ground with remote control!



MODEL NUMBER	AE100UMI-WCSBXCR	AE150UMI-WCSBXCR	AE200UMI-WCSBXCR	AE300UMI-WCSBXCR
ORDER CODE	112611	112612	112613	112614
Input Wattage	75/85/100W	100/125/150W	200W	200/250/300W
Voltage	120-277V (277-480V option)			
Delivered Lumens (lm)	10,950 - 16,550 lms	15,260 - 23,030 lms	21,360 - 30,090 lms	28,800 - 45,670 lms
Efficacy (lm/W)	146 - 168 lm/W	145 - 166 lm/W	146 - 161 lm/W	146 - 163 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	250W	400W	750W	1,000W
Controls	Controls Ready for c-Max, Twistlock receptacle option			
Lumen Maintenance (L70)	≥100,000 +hrs			
Mounting	Straight (A) or Flexible (F) Arm or Adjustable Slip Fitter (K) or Trunnion (T) Available			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

One lens with choice between Type III, IV or V using toggle switch or remote control, back light shield and visor accessories available

Barn Lights



CCTs Selectable



MODEL NUMBER	DBL40UT5-CSGPN	DBL60UT5-WCSGPN
ORDER CODE	104048	108567
Input Wattage	40W	36/48/60W
Voltage	120-277V (277-480V available)	
Delivered Lumens (lm)	5,300 lm	4,600/6,200/7,800 lm
Efficacy (lm/W)	120-130 lm/W	
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3,000K/4,000K/5,000K	
Replacement	150W MH	175W MH
Controls	c-Max PC included, c-Max Control Compatible*	
Lumen Maintenance (L70)	≥100,000 hours	
Mounting	24" curved arm included, neck accommodates 1 5/8"-2 3/8" OD brackets	
LISTINGS	UL, DLC Premium	

Enhanced Canopy/Parking Luminaires



CCTs Selectable:



MODEL NUMBER	CPL20UCSBCR	CPL30UCSBCR	CPL40UCSBCR	CPL60UWCSWCR
ORDER CODE	109421	109422	109423	109449
Input Wattage	20W	30W	40W	38/48/58W
Voltage	120-277V			
Delivered Lumens (lm)	2,500 lm	3,750 lm	5,000 lm	4,750 - 7,250 lm
Efficacy (lm/W)	120+lm/W			
Color Rendering Index (CRI)	≥70			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Distribution	Single lens meets Canopy/Parking/Stairwell and Low Bay DLC categories			
Replacement	100 MH	150 MH	175 MH	250 MH
Controls	Field Installable c-Max			
Lumen Maintenance (L70)	≥100,000 hours			
Mounting	Single screw hinge design for quick access to internal conduit holes for surface conduit installation			
LISTINGS	DLC Premium, UL, FCC			
	Comfort Lens, Beauty Plate, Battery Backup and different finishes available			

Value Canopy/Parking Luminaires



CCTs Available



MODEL NUMBER	CP20UP-50B	CP30UP-50B	CP45UP-50B
ORDER CODE	110641	110643	110645
Input Wattage	20W	30W	45W
Voltage	120-277V		
Delivered Lumens (lm)	3,000 lm	4,800 lm	6,400 lm
Efficacy (lm/W)	150 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	4,000K or 5,000K		
Replacement	70W MH	100W MH	150W MH
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	DLC Premium, Ulus, FCC, RoHS		
	Motion Sensor, Photocell, Canopy Optics and Beauty Plate with different finishes and battery backup accessory available		

Value Canopy/Parking Luminaires



CCTs Selectable:

70/100W

CCTs Selectable: 55W

CCTs Available:



MODEL NUMBER	CP55UP-50B	CP70UC-CSB	CP100UC-WCSB
ORDER CODE	110647	110693	110694
Input Wattage	55W	70W	100W
Voltage	120-277V		
Delivered Lumens (lm)	6,900 lm	9,560-10,200 lm	12,680-13,490 lm
Efficacy (lm/W)	150 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	4,000K or 5,000K		
Replacement	175W MH	200W MH	250W MH
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	DLC Premium, Ulus, FCC, RoHS		
	Motion Sensor, Photocell, Canopy Optics and Beauty Plate with different finishes and battery backup accessory available		

Post Top Spider Mount



MODEL NUMBER	PSM53UT5-50B	PSM78UT5-50B	PSM143UT5-50B
ORDER CODE	108715	108718	108713
Input Wattage	53W	78W	143W
Voltage	120-277V (480V option)		
Delivered Lumens (lm)	6900lm	9,700lm	15,700lm
Efficacy (lm/W)	129 lm/W	124 lm/W	110 lm/W
Color Rendering Index (CRI)	>70		
Color Temperature (CCT)	3,000K, 4,000K, 5,000K		
Distribution	Type 5		
Replacement	150W MH	250W MH	400W MH
Controls	Twist Lock PhotoCell or Motion Sensor Options		
Lumen Maintenance (L70)	>50,000 hours		
Mounting	2 3/8" OD slipfitter		
LISTINGS	UL, FCC, DLC, DLC Premium, 3G		

CCTs Available:



PathMax™ Classic Bollards Series



	36"	42"	36"	42"
MODEL NUMBER	BL-CLRF38U-40B36	BL-CLRF17U-40B	BL-CLRD38U-40B36	BL-CLRD17U-40BLR
ORDER CODE	14101675	14100775	14101671	14100980
Head	Flat		Dome	
Input Wattage	38W	17W	38W	17W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,610 lm	1,458 lm	3,610 lm	733 lm
Efficacy (lm/W)	95 lm/W	86 lm/W	95 lm/W	43 lm/W
Color Rendering Index (CRI)	>80	>80	>80	>80
Distribution	Wide Beam	Wide Beam	Wide Beam	Louver
Color Temperature (CCT)	4,000K			
Replacement	150W MH	70W MH	150W MH	70W MH
Dimming Compatible	N/A	0-10V	N/A	0-10V
Lumen Maintenance (L70)	≥50,000 hours	≥100,000 hours	≥50,000 hours	≥50,000 hours
LISTINGS	cULus, Wet Location, IP65			

CCTs Available:



Options available in different finishes, distributions, with louvers and customer heights; GFCI receptacle and glare shield accessories available.

Round and Square Slim Bollards



MODEL NUMBER	BRD30U-WCSB	BRF30U-WCSB	BSF30U-WCSB
ORDER CODE	111965	111968	112658
Shape & Size	Round Dome 6"	Round Flat 6"	Square Flat 6"
Input Wattage	10/20/30W		
Voltage	120-277V (480V option)		
Delivered Lumens (lm)	3,890 - 4,080 lms		3,630 - 3,730 lms
Efficacy (lm/W)	121 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	50/70W		
Controls	Photocell option		
Lumen Maintenance (L70)	≥100,000+ hours		
LISTINGS	DLC Premium, UL		

CCTs Selectable:



Different finish, heights, louver option and battery backup available

Mushroom and Stilt Leg Bollards



CCTs Selectable:



MODEL NUMBER	BMD37U-WCSB	BMF37U-WCSB	BS130U-WCSB	BS330U-WCSB
ORDER CODE	112728	112729	112719	112720
Shape & Size	Round Dome 8"	Flat Dome 8"	Single Stilt Leg 6"	Triple Stilt Leg 6"
Input Wattage	20/28/37W		10/20/30W	
Voltage	120-277V (480V option)			
Delivered Lumens (lm)	4,730-4,840 lms		3,510 - 3,630 lms	
Efficacy (lm/W)	121 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	50/70W			
Controls	Photocell option			
Lumen Maintenance (L70)	≥100,000+ hours			
LISTINGS	DLC Premium, UL			

Different finish, heights and battery backup options available

M Series™ - Floods



CCTs Selectable:



MODEL NUMBER	M30UCW-WCSBTCT	M55UCW-WCSBTCT	M75UCW-WCSBTCT	M150UCW-WCSBTCT
ORDER CODE	113066	113082	113088	113122
Input Wattage	15/22/30W	30/42/55W	42/55/75W	100/125/150W
Voltage	120-277V		120-277V, 277-480V option	
Delivered Lumens (lm)	2,360 - 5,330 lms	4,900 - 9,240 lms	6,080 - 12,260 lms	15,830 - 24,210 lms
Efficacy (lm/W)	144 - 182 lm/W	132 - 180 lp/W	133 - 179 lp/W	130 - 189 lp/W
Color Rendering Index (CRI)	≥70			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	70W	150W	200W	400W
Controls	Controls Ready for c-Max, Twistlock receptacle option			
Lumen Maintenance (L70)	≥100,000 hrs			
Mounting	Trunnion (T) or Adjustable Slip Fitter (K) Available			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

3 Changeable/rotatable beam spreads available C5S (Extra Wide 6x7), CW (Wide 6x6) or CN (Narrow 4x4), Visors and Visual Comfort Lens accessories also available.

M Series™ - Floods



CCTs Selectable:



MODEL NUMBER	M200UCW-CSBTCT	M250UCW-CSBKCR	M300UCW-WCSBTCT
ORDER CODE	113135	113143	113154
Input Wattage	200W	250W	200/250/300W
Voltage	120-277V (480V option)		
Delivered Lumens (lm)	31,020 - 34,500 lms	34,910 - 43,500 lms	31,020 - 47,690 lms
Efficacy (lm/W)	145 - 187 lp/W	131 - 180 lp/W	127 - 187 lp/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	750W	750/1,000W	1,000W
Controls	Controls Ready for c-Max, Twistlock receptacle option		
Lumen Maintenance (L70)	≥100,000+ hours		
Mounting	Trunnion (T) or Adjustable Slip Fitter (K) Available		
LISTINGS	UL, DLC Premium		

3 Changeable/rotatable beam spreads available C5S (Extra Wide 6x7), CW (Wide 6x6) or CN (Narrow 4x4), Visors and Visual Comfort Lens accessories also available.

FieldMax™ Sports/ High Output Floods



MODEL NUMBER	SHF515U-50WLY	SHF620U-50NLY	SHF1200H-50NLY
ORDER CODE	109398	109572	109400
Input Wattage	515W	620W	1,200W
Voltage	U = 120-277V, H = 220-480V		
Delivered Lumens (lm)	72,400 - 77,350 lm	92,200 - 100,200 lm	158,400 - 172,050 lm
Efficacy (lm/W)	130+ lm/W		
Color Rendering Index (CRI)	70+		
Color Temperature (CCT)	4,000K, 5,000K		
Beam Type	Wide, 7x6	Narrow, 4x4	Narrow, 4x4
Replacement	1,000 MH	1,500 MH	2,000 MH
Dimming Compatible	Multiple controls options available including dimming, remote control and dynamic lighting effects		
Lumen Maintenance (L70)	≥100,000 hours		
Mounting	Yoke or Slipfitter		
LISTINGS	DLC Premium, UL, IP65, 3G, FCC		

CCTs Available:



Multiple beam spreads (Narrow-Wide), Visor Accessory, Remote Mount Capability and Controls Option available

Slim Flood Lights



MODEL NUMBER	MSF15UW-50BKT	MSF29UW-50BKT	MSF50UW-50BKT	MSF70UW-CSBYRPC	MSF90UW-CSBSKRPC
ORDER CODE	104186	104190	104193	104196	104197
Input Wattage	15W	29W	50W	70W	90W
Voltage	120-277V				
Delivered Lumens (lm)	1,600 lm	3,400 lm	6,000 lm	9,000 lm	13,000 lm
Efficacy (lm/W)	114 lm/W	115 lm/W	118 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥83	≥84	≥83	≥82	≥82
Color Temperature (CCT)	5,000K	5,000K	5,000K	3,000/4,000/5,000K	
Beam Spread	Wide				
Replacement	70W MH	100W MH	150W MH	175W MH	250W MH
Lumen Maintenance (L70)	≥100,000 hrs				
Mounting	1/2" Threaded Knuckle	1/2" Threaded Knuckle	1/2" Threaded Knuckle	Yoke	Slip Fitter
LISTINGS	UL, 1.5G, FCC				

CCTs Available:



Consult literature for CCT availability 15-50W

70/90W CCT Selectable (3/4/5K) and include 3pin twist lock receptacle with shorting cap. Narrow lens available in 50W, Yoke and Slipfitter mounts available.

Adjustable Beam Floods 10-80W



MODEL NUMBER	MSF20UA-WCSBKTYPC	MSF35UA-WCSBKTYPC	MSF45UA-CSBKTYPC	MSF60UA-WCSBKTYPC	MSF80UA-WCSBKTYPC
ORDER CODE	111747	111757	111758	111752	111755
Input Wattage	Selectable 10/15/20W	Selectable 15/25/35W	45W	Selectable 45/50/60W	Selectable 55/70/80W
Voltage	120-277V				
Efficacy (lm/W)	127 - 143	130 - 161	133 - 163	124 - 156	137 - 155
Delivered Lumens (lm)	2,610 - 2,890	4,540 - 5,250	6,220 - 7,300	7,770 - 8,970	11,710 - 12,460
Color Rendering Index (CRI)	≥80				
Color Temperature (CCT)	3,000K/4,000K/5,000K				
Beam Angle	Adjustable between Narrow, Medium and Wide (55°, 75° and 90°)				
Controls	0-10V dimming leads staged and integral photocell with on/off switch				
Lumen Maintenance (L70)	≥100,000 hrs				
Mounting	1/2" threaded knuckle and yoke included (order TR2.37BZ for slipfitter applications)				
LISTINGS	DLC Premium, UL, FCC, ANSI 3G Vibration, IP65				

CCTs Selectable:





Adjustable Beam Floods 100-320W



MSF100/150W
Slipfitter Mount

210/320W
Yoke Mount

CCTs Selectable:



MODEL NUMBER	MSF100UA-CSBKPC	MSF150UA-WCSBKPC	MSF210UA-CSBKPR7	MSF320UA-WCSBKPR7
ORDER CODE	111736	111737	111744	111750
Input Wattage	100W	Selectable 100/130/150W	210W	Selectable 210/250/320W
Voltage	120-277V, 277-480V available			
Delivered Lumens (lm)	14,020 - 16,910 lm	19,570 - 21,540 lm	28,360 - 30,660 lm	40,070 - 44,880 lm
Efficacy (lm/W)	136 - 166 lm/W	128 - 155 lm/W	134 - 150 lm/W	127 - 142 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Mounting	2 3/8" OD Knuckle Slipfitter and Yoke available"			
Controls	0-10V dimming leads staged and integral photocell with on/off switch		0-10V dimming leads staged & 7pin twist lock receptacle with shunting cap	
Lumen Maintenance (L70)	≥100,000+ hrs			
Beam Angle	Adjustable between Narrow, Medium and Wide (55°, 75° and 90°)			
LISTINGS	DLC Premium, UL, FCC, ANSI 3G Vibration, IP65			

Bullet Flood Lights



CCTs Selectable:



MODEL NUMBER	BF25UW-WCSBPCTA	BF25UW-WCSWPCTA	
ORDER CODE	111125	111127	
Input Wattage	9W	16W	25W
Delivered Lumens (lm)	1,180 - 1,300 lm	2,090-2,320 lm	3,060-3,320lm
Efficacy (lm/W)	131-145lm/w		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Beam Angle	Medium (5x5, 45°) & Wide (7x7, 107°) in carton, Narrow (4x4 26°) sold as an accessory		
Lumen Maintenance (L70)	≥100,000 hrs		
Mounting	Adjustable Knuckle with 1/2" threaded Nipple		
LISTINGS	DLC Premium, ULus, FCC		

Narrow lens and shroud available as field installable accessories. Slip Fitter, ground stake and flat surface mount accessories also available. Available in White.

Steel 4" Straight Square Poles



MODEL NUMBER	PL-SQ4-15T11-BQ	PL-SQ4-20T11-BQ	PL-SQ4-25T11-BQ
ORDER CODE	14100934	14100935	14100936
Height	15'	20'	25'
Shaft Size	4" Square		
Gauge	11		
Finish	Bronze		
Mounting	2.375" O.D.x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Steel 5" Straight Square Poles



MODEL NUMBER	PL-SQ5-25T11-BQ	PL-SQ5-30T11-BQ	PL-SQ5-30T07-BQ
ORDER CODE	14100937	14100938	14100939
Height	25'	30'	30'
Shaft Size	5" Square		
Gauge	11	11	7
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Aluminum 4" Straight Square Poles



MODEL NUMBER	PL-SA4-12T1-B	PL-SA4-15T1-B	PL-SA4-16T3-B	PL-SA4-20T3-B
ORDER CODE	14102083	14102085	14102087	14102089
Height	12'	15'	16'	20'
Shaft Size	4" Square			
Wall Thickness	0.125"	0.125"	0.188"	0.188"
Finish	Bronze			
Mounting	2.375" O.D.x 4" Tall Tenon			

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Square Poles



MODEL NUMBER	PL-SA5-20T3-B	PL-SA5-25T3-B
ORDER CODE	14102091	14102093
Height	20'	25'
Shaft Size	5" Square	
Wall Thickness	0.188"	
Finish	Bronze	
Mounting	2.375" O.D. x 4" Tall Tenon	

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Steel 3" Straight Round Poles



MODEL NUMBER	PL-RS3-08T11-B	PL-RS3-10T11-B	PL-RS3-12T11-B
ORDER CODE	14101881	14101885	14101889
Height	8'	10'	12'
Shaft Size	3" Round		
Gauge	11		
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 4" Straight Round Poles



MODEL NUMBER	PL-RS4-15T11-B	PL-RS4-20T11-B
ORDER CODE	14101860	14101864
Height	15'	20'
Shaft Size	4" Round	
Gauge	11	
Finish	Bronze	
Mounting	2.375" O.D. x 4" Tall Tenon	

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Steel 5" Straight Round Poles



MODEL NUMBER	PL-RS5-25T11-B	PL-RS5-30T11-B	PL-RS5-30T07-B
ORDER CODE	14101869	14101877	14101875
Height	25'	30'	30'
Shaft Size	5" Round		
Gauge	11	11	7
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Round Poles



MODEL NUMBER	PL-RA5-12T3-B	PL-RA5-16T3-B	PL-RA5-20T3-B
ORDER CODE	14102076	14102078	14102080
Height	12'	16'	20'
Shaft Size	5" Round		
Wall Thickness	0.188"		
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. BAA - Contact MaxLite for lead times.

Mounting Accessories

BULLHORN - 2.375" wide x 4" tall Tenon Top




PL-BB218-B




PL-BB318L-B




PL-BB318-B



PL-BB312-B



PL-BB490-B



PL-BB418-B

SPOKE BRACKETS - 2.375" wide x 4" tall Tenon Top




PL-SB190-B



PL-SB218-B



R4HT290BZ



PL-SB390-B



PL-SB490-B

POLES FITTER



S4VT1S00B (4" SQ POLE)
S5VT1S00B (5" SQ POLE)



S4HT218BZ (4" SQ POLE)
S5HT218BZ (5" SQ POLE)



S4HT290BZ (4" SQ POLE)
S5HT290BZ (5" SQ POLE)




S4HT390BZ (4" SQ POLE)



S4HT490BZ (4" SQ POLE)

SQUARE BRACKET



PL-SM218-B (4" SQ POLE)



S5VT2S18BZ (5" SQ POLE)



S4VT3S18BZ (4" SQ POLE)
S5VT3S18BZ (5" SQ POLE)



S4VT4S90BZ (4" SQ POLE)
S5VT4S90BZ (5" SQ POLE)

TENON REDUCER



TR2.37BZ (2-3/8" TO 1/2")



TR3BZ (3" TO 2-3/8")



R4VT1S00BZ (4" TO 2-3/8")

WALL MOUNT BRACKET



WMB1HB



WMB1VB



WOOD POLES COLLAR BULLHORN



PL-CB190-9B (POLE Ø 5"-9")
PL-CB190-13B (POLE Ø 10"-13")



PL-CB218-9B (POLE Ø 5"-9")
PL-CB218-13B (POLE Ø 10"-13")



PL-CB390-9B (POLE Ø 5"-9")
PL-CB390-13B (POLE Ø 10"-13")



PL-CB490-9B (POLE Ø 5"-9")
PL-CB490-13B (POLE Ø 10"-13")


* 50 lbs max / arm for poles Ø 5"-9" applicable brackets | 90 lbs max/arm for poles Ø 10"-13" applicable brackets

WOOD POLES ANGLE CROSSARM



PL-XAB2-B (2 FIXTURES)
PL-XAB3-B (3 FIXTURES)
PL-XAB4-B (4 FIXTURES)
PL-XAB5-B (5 FIXTURES)

STEEL POLES COLLAR CROSSARM



PL-XCB2-B (2 FIXTURES)
PL-XCB3-B (3 FIXTURES)
PL-XCB4-B (4 FIXTURES)

STEEL POLES SIDE CROSSARM



PL-XSB2-B (2 FIXTURES)
PL-XSB3-B (3 FIXTURES)
PL-XSB4-B (4 FIXTURES)
PL-XSB5-B (5 FIXTURES)
PL-XSB6-B (6 FIXTURES)

FLOOD ACCESSORIES



JBOXB-4TH



MTGCOVER



GROUNDSTAKE

* Review product specs on our website for dimensions or contact us for a detailed drawing

GuardMax™ Oval Wall Packs



CCTs Selectable:



MODEL NUMBER	SECR15U-CSBPC	SECR15U-CSBPCE0	SECR15U-CSBPCE2
ORDER CODE	110955	110956	110957
Input Wattage		15W	
Voltage		120-277V 50/60Hz	
Delivered Lumens (lm)		1,900 - 1,940	
Efficacy (lm/W)		132-138	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		3,000K/4,000K/5,000K (5,000K default)	
Battery	No Battery	OC battery included	-20C battery included
LISTINGS	UL, FCC and DLC Premium		

Contact Maxlite for different finishes

GuardMax™ Slim Security Light



CCTs Selectable:



MODEL NUMBER	SECS15UCSBPC	SECS26UCSBPC
ORDER CODE	103975	103856
Input Wattage	15W	26W
Voltage		120-277V
Delivered Lumens (lm)	1,900 lm	3,320 lm
Efficacy (lm/W)	126 lm/W	124 lm/W
Color Rendering Index (CRI)	>80	>80
Color Temperature (CCT)		4,000K/5,000K
Replacement	100W MH	175W MH
Controls	Integral photocell with on/off switch	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	UL, FCC, IP66	

GuardMax™ Slim Security Light (DLC)



CCTs Selectable:



MODEL NUMBER	SECS15UD-CSBPC	SECS30U-WCSBPC
ORDER CODE	104056	104059
Input Wattage	15W	15/25/30W
Voltage		120-277V
Delivered Lumens (lm)	2,100 lm	4,000 lm
Efficacy (lm/W)	140 lm/W	133 lm/W
Color Rendering Index (CRI)		≥80
Color Temperature (CCT)		3,000K/4,000K/5,000K
Replacement	100W	175W
Controls	Integral photocell with on/off switch	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	DLC Premium, UL, FCC, IP66	

GuardMax™ Emergency Motion Sensor Security Light



CCTs Available:

6500K



MODEL NUMBER	EML-MS
Order Code	105537
Input Wattage	Battery
Voltage	100-300V
Delivered Lumens (lm)	89 lm per head
Color Temperature (CCT)	6,000K-6,500K
Controls	Photocell & 130° detection Motion Sensor
LISTINGS	UL 924 WL

LED Motion Sensor Security Light



CCTs Available:

5000K



MODEL NUMBER	MSL2HW	MSL2HL
ORDER CODE	111634	111292
Input Wattage	28W	
Voltage	120V	
Delivered Lumens (lm)	2,500 lm	
Efficacy (lm/W)	90 lm/W	
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	5,000K	
Mounting	Wall, hardware included (see instruction manual)	
Controls	PIR Motion Sensor and integral photocell, 3 sensitivity settings 13'-45' range	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	ETL, FCC, IP65	

LED Area Security Light



CCTs Available:

5000K



MODEL NUMBER	SBL35120V-5KBPC
ORDER CODE	111637
Input Wattage	35W
Voltage	120V
Delivered Lumens (lm)	4,000 lm
Efficacy (lm/W)	114 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5,000K
Mounting	Wall, arm sold separately
Controls	Photocell included
Lumen Maintenance (L70)	≥100,000 hours
LISTINGS	ETL, FCC, IP65

LED Lamp Included Vaporproof Jelly Jars



	WALL MOUNT	CEILING MOUNT
MODEL NUMBER	JJW12001	JJC12001
ORDER CODE	101439	101443
Number of Lamps	1 x A19 E26 Base	1 x A19 E26 Base
Voltage	120V	120V
Max Wattage	100W INC	100W INC
LISTINGS	UL, ENERGY STAR®	UL, ENERGY STAR®

JA8 and ENERGY STAR® certified lamp included. Optional dusk to dawn lamp with intergrated photocell available.

CCTs Available:



LED Integrated Adjustable Vaporproof Jelly Jars w/Selectable CCT



MODEL NUMBER	JJX20UCS
ORDER CODE	105177
Input Wattage	20W
Voltage	120-277V
Delivered Lumens (lm)	1,800 lm
Efficacy (lm/W)	90 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3,000K/4,000K/5,000K
Replacement	150W INC
Dimming Compatible	N/A
Lumen Maintenance (L70)	≥50,000 hours
Mounting	Pendant, Ceiling, Wall Mount
LISTINGS	UL, IP65, ENERGY STAR®, FCC

CCTs Selectable:



M Series™ - Wall Mounts



MODEL NUMBER	M30UC4W-WCSBWCR	M55UC4W-WCSBWCR	M75UC3M-WCSBWCR	M150UC3M-WCSBWCR
ORDER CODE	112370	112371	113092	113126
Input Wattage	15/22/30W	30/42/55W	42/55/75W	100/125/150W
Voltage	120-277V		120-277V, 277-480V option	
Delivered Lumens (lm)	2,360 - 5,330 lms	4,900 - 9,240 lms	6,080 - 12,260 lms	15,830 - 24,210 lms
Efficacy (lm/W)	144 - 182 lm/W	132 - 180 lp/W	133 - 179 lp/W	130 - 189 lp/W
Color Rendering Index (CRI)	≥70			
Color Temperature (CCT)	3,000K/4,000K/5,000K			
Replacement	70W	150W	200W	400W
Controls	Controls Ready for c-Max, Twistlock receptacle option			
Lumen Maintenance (L70)	≥100,000 hrs			
Mounting	Fixed (W), Variable (V, tiltable) or EM, all with 4x1/2" conduit holes (one on each side)			
LISTINGS	UL, DLC Premium			

6 distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Visual Comfort Lens accessory and Battery Backup (≤55W) options also available.

CCTs Selectable:



M Series™ - Wall Mounts



CCTs Available:



MODEL NUMBER	M200U4W-CSBWCR	M250UC3M-CSBWCR	M300UC3M-WCSBWCR
ORDER CODE	106226	XXXXXX	XXXXXX
Input Wattage	200W	250W	200/250/300W
Voltage	120-277V (277-480V option)		
Delivered Lumens (lm)*	31,020 - 34,500 lms	34,910 - 43,500 lms	31,020 - 47,690 lms
Efficacy (lm/W)	145 - 187 lp/W	131 - 180 lp/W	127 - 187 lp/W
Color Rendering Index (CRI)	>70		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	750W	750/1,000W	1,000W
Controls	Controls Ready for c-Max, Twistlock receptacle option		
Lumen Maintenance (L70)	> 100,000 hrs		
Mounting	Fixed (W), Variable (V, tiltable) or EM, all with 4x1/2" conduit holes (one on each side)		
LISTINGS	UL, DLC Premium		

6 distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Visual Comfort Lens accessory options also available.

WallMax™ Cut Off Wall Packs



CCTs Selectable:



MODEL NUMBER	WPC16U-CSBPCCR	WPC20U-WCSBPCCR	WPC28U-WCSBPCCR
ORDER CODE	112566	112567	112568
Input Wattage	16W	10/16/20W	15/20/28W
Voltage	120-277V		
Delivered Lumens (lm)	2,220 - 2,510 lms	1,390 - 3,240 lms	2,220 - 4,200 lms
Efficacy (lm/W)	133 - 153 lm/W	139 - 157 lp/W	137 - 150 lp/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	50W		70W
Controls	Integral photocell and Controls Ready for c-Max controls		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

Battery backup options available.

WallMax™ Cut Off Wall Packs



CCTs Selectable:



MODEL NUMBER	WPC40U-WCSBPCCR	WPC70U-WCSBPCCR	WPC100U-WCSBPCCR
ORDER CODE	112569	112570	112571
Input Wattage	20/30/40W	50/59/70W	84/90/100W
Voltage	120-277V		
Delivered Lumens (lm)	3,010 - 6,360 lms	7,100 - 10,990 lms	10,920 - 14,500 lms
Efficacy (lm/W)	146 - 163 lm/W	142 - 157 lp/W	130 - 145 lp/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	175W	200W	250W
Controls	Integral photocell and Controls Ready for c-Max controls		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

Battery backup options available.

WallMax™ Thin Cutoff Wall Packs



15-29W



CCTs Selectable:



MODEL NUMBER	WTC15U-CSBPC	WTC25U-WCSBPC	WTC29U-WCSBPC
ORDER CODE	111063	111064	111065
Input Wattage	15W	25W	29W
Voltage	120V-277V		
Delivered Lumens (lm)	2,100-2,280 lms	3,430- 3,710 lms	4,010-4,290 lms
Efficacy (lm/W)	139-152 lm/W	138-148 lm/W	135-148 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	50W	100W	150W
Controls	c-Max Compatible using CEA accessory		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

Type 4 standard, field changeable Type 3 lens available, housing adjustable up to 90 degrees

WallMax™ Thin Cutoff Wall Packs



50-120W



CCTs Selectable:



MODEL NUMBER	WTC50U-CSBPC	WTC75U-WCSBPC	WTC120U-WCSBPC
ORDER CODE	111316	111066	111067
Input Wattage	50W	75W	120W
Voltage	120V-277V		
Delivered Lumens (lm)	6,810-7,310 lms	9,600-10,640 lms	15,260- 17,010 lms
Efficacy (lm/W)	136-146 lm/W	126-142 lm/W	126-142 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	175W	250W	400W
Controls	c-Max Compatible using CEA accessory		
Lumen Maintenance (L70)	100,000+ hours		
LISTINGS	UL, DLC Premium		

Type 4 standard, field changeable Type 3 lens available, housing adjustable up to 90 degrees

WallMax™ Open Face Wall Packs



CCTs Selectable:



MODEL NUMBER	WPOP33U-CSBPCCR	WPOP40U-WCSBPCCR	WPOP55U-WCSBPCCR
ORDER CODE	112928	112414	112415
Input Wattage	33W	15/33/40W	30/45/55W
Voltage	120-277V		
Delivered Lumens (lm)	5,050 - 5,300 lms	2,160 - 5,860 lms	3,730 - 8,190 lms
Efficacy (lm/W)	144 - 150 lm/W	139 - 147 lp/W	140 - 149 lp/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	150W	175W	250W
Controls	Integral photocell and Controls Ready for c-Max controls		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

Battery backup options available.

WallMax™ Open Face Wall Packs



MODEL NUMBER	WPOP80U-WCSBPCCR	WPOP100U-CSBPCCR	WPOP120U-WCSBPCCR
ORDER CODE	112416	113221	112417
Input Wattage	59/70/80W	100W	90/100/120W
Voltage	120-277V	120-277V, 277-480V option	
Delivered Lumens (lm)	8,1300 - 11,570 lms	14,200 - 14,990 lms	12,450 - 17,200 lms
Efficacy (lm/W)	137 - 145 lm/W	138 - 143 lp/W	138 - 144 lp/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	320/350W	400W	750W
Controls	Integral photocell and Controls Ready for c-Max controls		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

CCTs Selectable:



Battery backup options available.

WallMax™ Compact Open Face Wall Packs



MODEL NUMBER	WCF29U-CSBPC	WCF40U-WCSBPC	WCF60U-WCSBPC
ORDER CODE	111241	111059	111060
Input Wattage	29W	28/35/40W	40/50/60W
Voltage	120-277V		
Delivered Lumens (lm)	4,460 - 4,730 lms	4,460 - 6,550 lms	6,220 - 9,480 lms
Efficacy (lm/W)	150 - 159 lm/W	145 - 158 lp/W	146 - 158 lp/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/4,000K/5,000K		
Replacement	150W	175W	250W
Controls	Integral photocell, c-Max ready using CEA accessory		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, DLC Premium		

CCTs Selectable:



Visor and Wire Guard accessories, Battery Backup option available

WallMax™ Compact Open Face Wall Packs



MODEL NUMBER	WCF80U-WCSBPC	WCF120U-WCSBPC
ORDER CODE	111240	111062
Input Wattage	60/70/80W	80/100/120W
Voltage	120-277V	
Delivered Lumens (lm)	8,620 - 12,840 lms	11,950 - 18,470 lms
Efficacy (lm/W)	140 - 160 lm/W	140 - 153 lp/W
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3,000K/4,000K/5,000K	
Replacement	400W	750W
Controls	Integral photocell, c-Max ready using CEA accessory	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	UL, DLC Premium	

CCTs Selectable:



Visor and Wire Guard accessories, Battery Backup option available

Flood Class I Division 1 HL-AR-D1 Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K



MODEL NUMBER	HL-AR100UW-50G-D1	HL-AR150UW-50G-D1
ORDER CODE	1409543	1409545
Input Wattage	100W	150W
Voltage	120-277V	
Delivered Lumens (lm)	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5,000K	
Distribution	120°	
Replacement	400W MH	400W PSMH
Temperature Rating	T6	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	DLC, UL844, UL1598, UL1598A	

Flood Class I Division 2 HL-AR Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K



MODEL NUMBER	HL-AR100UW-50G	HL-AR150UW-50G
ORDER CODE	1409413	107620
Input Wattage	100W	150W
Voltage	120-277V	
Delivered Lumens (lm)	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5,000K	
Distribution	120°	
Replacement	400W MH	400W
Temperature Rating	T4A	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	DLC, UL1598A, UL844	

Wall Pack Class I Division 2 HL-WP Series



CCTs Available:

4000K

5000K



MODEL NUMBER	HL-WP26U40	HL-WP26U50	HL-WP43U40	HL-WP43U50
ORDER CODE	14101835	14101734	14101837	14101836
Input Wattage	26W	26W	43W	43W
Voltage	120-277V			
Delivered Lumens (lm)	3,199 lm	3,332 lm	5,316 lm	5,538 lm
Efficacy (lm/W)	121 lm/W	126 lm/W	123 lm/W	128 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4,000K	5,000K	4,000K	5,000K
Distribution	110°			
Replacement	70W HID	70W HID	150W HID	150W HID
Dimming Compatible	0-10V			
Temperature Rating	T4			
Lumen Maintenance (L70)	≥147,000 hours			
LISTINGS	IP66, BAA, ETL			

*BAA - Contact MaxLite for lead times.

Linear Class I Division 2 HL-LI Series




CCTs Available:



MODEL NUMBER	HL-LI2440	HL-LI4880
ORDER CODE	1409547	1409549
Input Wattage	40W	80W
Voltage	120-277V	
Delivered Lumens (lm)	5,480 lm	10,960 lm
Efficacy (lm/W)	130 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	3,000K, 4,000K, 5,000K	
Temperature Rating	T3C	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	DLC, UL844, UL 8750, UL1598A, FCC, LM79, LM80	

40W = 2-FT, 80W = 4-FT
347-480V options also available.
Available in 110° beam angles.

Linear Class I Division 1 HL-LI Series

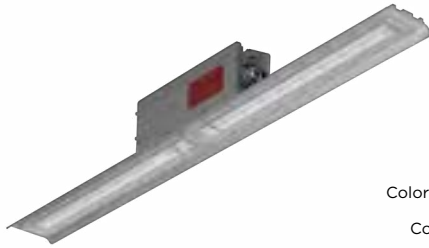

CCTs Available:



MODEL NUMBER	HL-LI2440UP-D1	HL-LI4880UP-D1
ORDER CODE	103013	103014
Input Wattage	38W	80W
Voltage	120-277V	
Delivered Lumens (lm)	4,500 lm	9,200 lm
Efficacy (lm/W)	118 lm/W	115 lm/W
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5,000K	
Replacement	150W MH	250W MH
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	≥50,000 hours	
Mounting	Pendant Mount	
LISTINGS	DLC, UL844, UL8750, UL1598A, UL1598, FCC	

Available with yoke mount; secondary retention point, safety cable (rated for 250lbs), and EM option.

High Bay Class I Division 2 HLRS Series



CCTs Available:



MODEL NUMBER	HLRS45UP	HLRS65UP
ORDER CODE	103299	103300
Input Wattage	42W	65W
Voltage	120-277V	
Delivered Lumens (lm)	6,685 lm	10,136 lm
Efficacy (lm/W)	158 lm/W	156 lm/W
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5,000K	
Beam Angle	110°	
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	DLC, UL1598, UL1598A, UL844, FCC	

347-480V options also available. Pendant, Yoke, Ceiling, Wall and Stanchion mount options available.



High Bay Class I Division 2 HLRM Series



CCTs Available:

5000K



MODEL NUMBER	HLRM80U	HLRM120U	HLRM150U	HLRM200U
ORDER CODE	104877	104894	104912	104931
Input Wattage	80	120	150	200
Voltage	120-277			
Delivered Lumens (lm)	12,000	18,000	22,500	30,000
Efficacy (lm/W)	150			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	5,000K			
Beam Angle	110°			
Replacement	320W MH	450W MH	600W MH	750W MH
Temperature Rating	X			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, cETLus Classified, FCC, IP66			

347-480V; Drop lens and Diffused lens options available. Wire guard, Yoke bracket, Wall and Stanchion mount accessories also available.

Low Bay/Jelly Jar Class I Division 2 HLRS Series



CCTs Available:

5000K



MODEL NUMBER	HLRS45ULP	HLRS65ULP
ORDER CODE	103301	103302
Input Wattage	45W	65W
Voltage	120-277V	
Delivered Lumens (lm)	5,760 lm	8,900 lm
Efficacy (lm/W)	136 lm/W	137 lm/W
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5,000K	
Distribution	130°	
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	DLC, UL1598, UL1598A, UL844, FCC	

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

LED Emergency Lights



EML-2HSQW



EML-2HOW



EMT-2WH



	EML-2HSQW	EML-2HOW	EMT-2WH
MODEL NUMBER	108291	112388	112366
Voltage	120 or 277V		
Finish	White		
Mounting	Ceiling or Wall		
Options	SD & WL		Remote Capable Standard, SD & WL
LISTINGS	UL924 DL		

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.


LED High Capacity Emergency Lights



	EML-2HWHC	EML-2HWHCRC
MODEL NUMBER		
ORDER CODE	105863	105864
Voltage	120 or 277V	
Finish	White	
Mounting	Ceiling or Wall	
Options	SD & WL	Remote Capable, SD & WL
LISTINGS	UL924 DL	

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED Remote Heads



ERI (Indoor)



ERO (Outdoor)



	ERI-SW	ERI-2HW	ERO-SW	ERO-2HW
MODEL NUMBER				
ORDER CODE	14101482	14101483	14101484	14101485
Voltage	LV			
Finish	White			
Mounting	Ceiling or Wall			
Options	Single Head, Indoor	Double Head, Indoor	Single Head, Outdoor	Double Head, Outdoor
LISTINGS	cUL DL			

See data sheet for remote capable fixture compatibility.

LED High Capacity Remote Heads



(Use with High Capacity Emergency Light only)



	ER-SWHC	ER-2HWHC
MODEL NUMBER		
ORDER CODE	108393	108394
Voltage	LV	
Finish	White	
Mounting	Ceiling or Wall	
Options	Single Head, Indoor	
LISTINGS	cUL DL	

See data sheet for remote capable fixture compatibility.

LED Exit Signs



MODEL NUMBER	EXT-RW	EXT-GW	EX-RWRC	EX-GWRC
ORDER CODE	105541	105542	103369	103368
Voltage	120 or 277			
Finish	Red & White	Green & White	Red & White	Green & White
Mounting	Ceiling or Wall			
Options	SD & WL	SD & WL	Remote Capable, SD & WL	
LISTINGS	UL 924 DL			

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.


LED Exit Sign Combos



MODEL NUMBER	EXTC-RW	EXTC-GW	EXC-RWRC	EXC-GWRC	EXC-RGWRC
ORDER CODE	105543	105544	103370	103371	112888
Voltage	120 or 277				
Finish	Red & White	Green & White	Red & White	Green & White	Green/Red & White
Mounting	Ceiling or Wall				
Options	SD & WL	SD & WL	Remote Capable, SD & WL	Remote Capable, SD & WL	Remote Capable, SD & WL
LISTINGS	UL 924 DL				

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED Exit Signs/ Combo Dual Color



	EX-RGW	EXC-RGW	EXC-RGWRC
ORDER CODE	112660	112661	112888
Voltage	120 or 277V		
Finish	Both Red and Green with White Housing		
Mounting	Ceiling or Wall		
Options	AC version		Remote Heads
LISTINGS	UL924 DL		

LED Edgelit Exit Signs



MODEL NUMBER	EXE-RS1S	EXE-RS2S	EXE-GS1S	EXE-GS2S
ORDER CODE	105539	105540	105545	105546
Voltage	120 or 277			
Finish	Red & Silver	Red & Mirror	Green & Silver	Green & Mirror
Mounting	Ceiling or Wall			
Options	Sided	Two Sided	Sided	Two Sided
LISTINGS	UL 924 DL			

Also available in white housing.

LED Aluminum Exit and Combo Signs




MODEL NUMBER	EXA-RW	EXA-GW	EXAC-RW	EXAC-GW
ORDER CODE	108895	108896	108897	108898
Voltage	120 or 277			
Finish	Red & Aluminum	Green & Aluminum	Red & Aluminum	Green & Aluminum
Mounting	Ceiling or Wall			
Combo	Includes adjustable linear LEDs standard			
Options	Remote Test Capability			
LISTINGS	CSA (UL 924)			

A19 - 4.5W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EF4.5A19D27/JA81	EF4.5A19D30/JA81	EFF4.5A19D27/JA81	EFF4.5A19D30/JA81
ORDER CODE	110545	110546	110547	110548
Input Wattage	4.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	450 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K, 3,000K			
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

A19 - 10W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EF10A19D927/JA81	EF10A19D930/JA81	EFF10A19D927/JA81	EFF10A19D930/JA81
ORDER CODE	110553	110554	110555	110556
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K, 3,000K			
Replacement	75W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			


A21 - 13W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)	A21 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	EF13A21D927/JA81	EF13A21D930/JA81	EFF13A21D927/JA81	EFF13A21D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	13W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1600 lm			
Efficacy (lm/W)	123 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K, 3,000K			
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

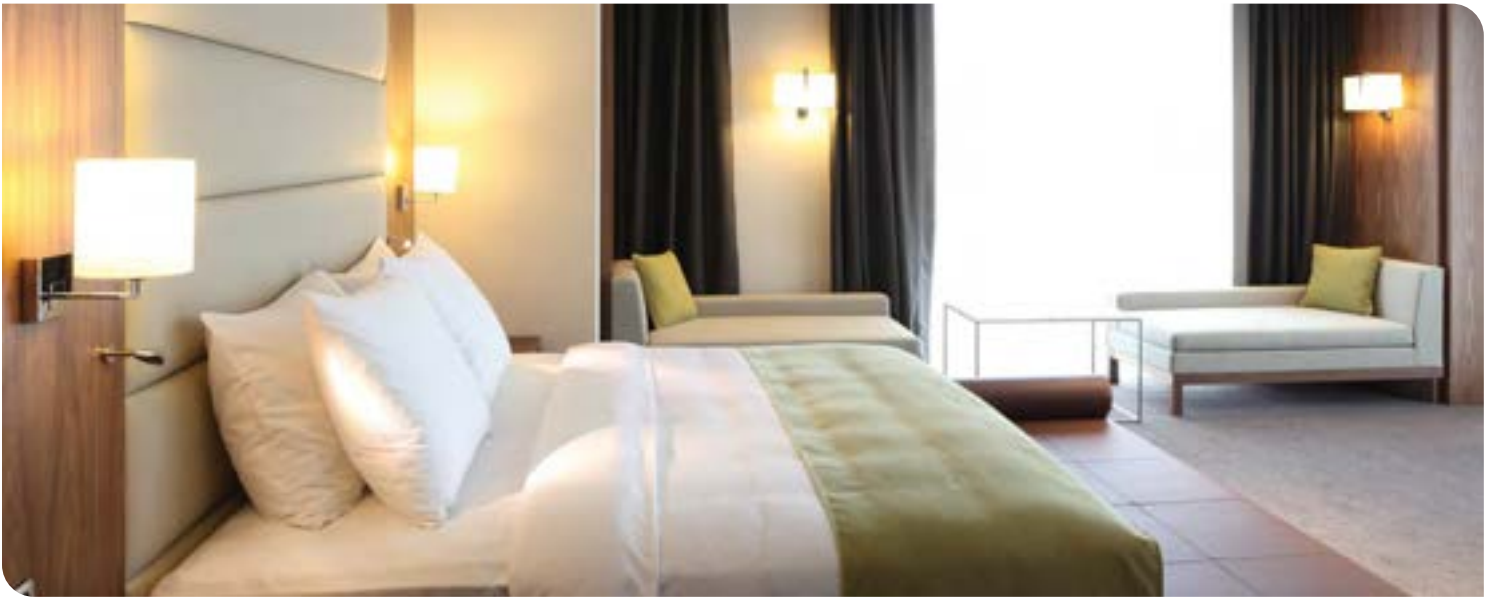

A19 - 4.5W, 10W, 13W, LED Frosted Filament A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EFF4.5A19D27*	EFF10A19D27	EFF13A21D27
ORDER CODE	14101717	14101720	14101723
Input Wattage	4.5W	10W	13W
Voltage	120V		
Delivered Lumens (lm)	450 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	100 lm/W	110 lm/W	123 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2,700K		
Replacement	40W INC	75W INC	100W INC
Dimming Range	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥15,000 hours		
LISTINGS	UL		

3000K and 5000K options.

A19 - 8.5W, LED Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EFF8.5A19D927/JA81	EFF8.5A19D930/JA81
ORDER CODE	110549	110550
Input Wattage	8.5W	8.5W
Voltage	120V	
Delivered Lumens (lm)	800 lm	
Efficacy (lm/W)	94 lm/W	
Color Rendering Index (CRI)	≥90	
Color Temperature (CCT)	2,700K	3,000K
Replacement	60W INC	
Dimming Range	Yes - Triac/10-100%	
Lumen Maintenance (L70)	≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E	

ST19 - 5W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F5ST19DLED922/JA81	F5ST19DLED927/JA81	F5ST19DLED930/JA81
ORDER CODE	110577	110615	110616
Input Wattage		5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2,700K	3,000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 8.5W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F8ST19DLED922/JA81	F8ST19DLED927/JA81	F8ST19DLED930/JA81
ORDER CODE	110578	110617	110618
Input Wattage		8.5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		800 lm	
Efficacy (lm/W)		94 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2,700K	3,000K
Replacement		60W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 10W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F10ST19DLED922/JA81	F10ST19DLED927/JA81	F10ST19DLED927/JA81
ORDER CODE	110579	110619	110620
Input Wattage		10W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2,700K	3,000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 5W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V5ST19DLED922/JA81	V5ST19DLED927/JA81	V5ST19DLED930/JA81
ORDER CODE	110580	110621	110622
Input Wattage		5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2700K	3,000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 8.5W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V8ST19DLED922/JA81	V8ST19DLED927/JA81	V8ST19DLED930/JA81
ORDER CODE	110579	110619	110624
Input Wattage		8.5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		765 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2,700K	3,000K
Replacement		60W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 10W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V10ST19DLED922/JA81	V10ST19DLED927/JA81	V10ST19DLED930/JA81
ORDER CODE	110582	110621	110626
Input Wattage		10W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		1000 lm	
Efficacy (lm/W)		100 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2,200K	2,700K	3,000K
Replacement		100W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		≥15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 6.5W, 7W, LED Clear/Vintage Filament Lamps - JA8



CCTs Available:



ST19 (E26 BASE)	
MODEL NUMBER	F7ST19DLED927/JA8
ORDER CODE	14098828
Input Wattage	7W
Voltage	120V
Delivered Lumens (lm)	600 lm
Efficacy (lm/W)	86 lm/W
Color Rendering Index (CRI)	≥90
Color Temperature (CCT)	2,700K
Replacement	60W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	≥15,000 hours
LISTINGS	UL listed, RoHS Compliant, FCC, T20, JA8-2022-E

B10 - 3.5W, 5W, LED Frosted Filament Candelabras



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EFF3.5B1027	EFF3.5B1027C	EFF5B1027	EFF5B1027C
ORDER CODE	14101729	14101727	14101733	14101731
Input Wattage	3.5W	3.5W	5W	5W
Voltage	120V			
Delivered Lumens (lm)	325 lm	325 lm	525 lm	525 lm
Efficacy (lm/W)	92 lm/W	92 lm/W	105 lm/W	105 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	2,700K	2,700K	2,700K	2,700K
Replacement	40W INC	40W INC	60W INC	60W INC
Dimming Compatible	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	UL			

B10 - 3.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EF3B10D927/JA81	EF3B10D930/JA81	EFF3B10D927/JA81	EFF3B10D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	3.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	315 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2700K	3,000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

B10 - 5.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EF5B10D927/JA81	EF5B10D930/JA81	EFF5B10D927/JA81	EFF5B10D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

BA10 - 5.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)
MODEL NUMBER	EF5BA10D927/JA8	EF5BA10D930/JA8	EFF5BA10D927/JA8	EFF5BA10D930/JA8
ORDER CODE	110573	110574	110575	110576
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	600 lm			
Efficacy (lm/W)	100 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

BA10 - 4.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)
MODEL NUMBER	EF5B10D927/JA81	EF3.5BA10D930/JA8	EFF3.5BA10D927/JA8	EFF3.5BA10D930/JA8
ORDER CODE	110569	110570	110571	110572
Input Wattage	4.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	405 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

T12 - 8.5W, LED Clear/Frosted Filament Lamps - JA8



CCTs Available:



	T12 FROSTED (GU24 BASE)	T12 FROSTED (E26 BASE)	T12 CLEAR (E26 BASE)
MODEL NUMBER	EFF8.5T12GUD927/JA8**	EFF8.5T12D927/JA8*	EF8.5T12D927/JA8*
ORDER CODE	101318	103044	101335
Input Wattage		8.5W	
Voltage		120V	
Delivered Lumens (lm)		800 lm	
Efficacy (lm/W)		94 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)		2,700K	
Replacement		60W INC	
Dimming Compatible		No	
Lumen Maintenance (L70)		≥11,000 hours	
LISTINGS		UL, T20, JA8	

*2700K and 3000K options.
**2700K, 3000K, and 4000K options.

T10 - 4W, LED Clear Filament Lamp - JA8



CCTs Available:



	T10 (E26 BASE)
MODEL NUMBER	F4T10DLED927/JA8
ORDER CODE	1409894
Input Wattage	4W
Voltage	120V
Delivered Lumens (lm)	300 lm
Efficacy (lm/W)	75 lm/W
Color Rendering Index (CRI)	≥90
Color Temperature (CCT)	2,700K
Replacement	40W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	≥15,000 hours
LISTINGS	UL, T20, JA8

S14 - 2W, LED Clear/Frosted Filament Lamps



CCTs Available:



	CLEAR (E26 BASE)	FROSTED (E26 BASE)
MODEL NUMBER	F2S14ND27	FF2S14ND27
ORDER CODE	101418	101425
Input Wattage		2W
Voltage		120V
Delivered Lumens (lm)	180 lm	160 lm
Efficacy (lm/W)	90 lm/W	80 lm/W
Color Rendering Index (CRI)		≥80
Color Temperature (CCT)		2,700K
Replacement		11W INC
Dimming Compatible		No
Lumen Maintenance (L70)		≥15,000 hours
LISTINGS		UL



G16.5 - 3.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G16.5 CLEAR (E12 BASE)	G16.5 CLEAR (E12 BASE)	G16.5 FROSTED (E12 BASE)	G16.5 FROSTED (E12 BASE)
MODEL NUMBER	EF3G16.5D927/JA8	EF3G16.5D930/JA8	EFF3G16.5D927/JA81	EFF3G16.5D930/JA81
ORDER CODE	110583	110584	110585	110586
Input Wattage	3.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	315 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	25W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G16.5 - 5.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G16.5 CLEAR (E12 BASE)	G16.5 CLEAR (E12 BASE)	G16.5 FROSTED (E12 BASE)	G16.5 FROSTED (E12 BASE)
MODEL NUMBER	EF5G16.5D927/JA8	EF5G16.5D930/JA8	EFF5G16.5D927/JA81	EFF5G16.5D930/JA81
ORDER CODE	110587	110588	110589	110590
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G25 CLEAR (E26 BASE)	G25 CLEAR (E26 BASE)	G25 FROSTED (E26 BASE)	G25 FROSTED (E26 BASE)
MODEL NUMBER	EF8.5G25D927/JA81	EF8.5G25D930/JA81	EFF8.5G25D927/JA81	EFF8.5G25D930/JA81
ORDER CODE	110595	110596	110593	110594
Input Wattage	5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	450 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 8.5W, LED Clear/Frosted Filament Globes - JA8



G25 CLEAR (E26 BASE) G25 CLEAR (E26 BASE) G25 FROSTED (E26 BASE) G25 FROSTED (E26 BASE)

MODEL NUMBER	EF8.5G25D927/JA81	EF8.5G25D930/JA81	EFF8.5G25D927/JA81	EFF8.5G25D930/JA81
ORDER CODE	110595	110596	110597	110598
Input Wattage	8.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	800 lm			
Efficacy (lm/W)	94 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			



CCTs Available:



G25 - 8.5W, LED Clear Filament Globe - JA8



G25 CLEAR (E26 BASE)

MODEL NUMBER	EF8.5G25D927/JA8
ORDER CODE	104845
Input Wattage	8.5W
Voltage	120V
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	94 lm/W
Color Rendering Index (CRI)	≥90
Color Temperature (CCT)	2,700K
Replacement	40W Inc
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	≥15,000 hours
LISTINGS	UL, ENERGY STAR®



CCTs Available:



G25 - 10W, LED Clear/Frosted Filament Globes - JA8



G25 CLEAR (E26 BASE) G25 CLEAR (E26 BASE) G25 FROSTED (E26 BASE) G25 FROSTED (E26 BASE)

MODEL NUMBER	EF10G25D927/JA81	EF10G25D930/JA81	EFF10G25D927/JA81	EFF10G25D930/JA81
ORDER CODE	110599	110600	110601	110602
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1,100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	150W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			



CCTs Available:



G25 - 3W, 4.5W, LED Clear/Frosted Filament Globes



CCTs Available:




	G25 CLEAR (E26 BASE)	G25 CLEAR (E26 BASE)	G25 FROSTED (E26 BASE)
MODEL NUMBER	EF3G25D27	EF3G25D50	EFF4.5G25D27
ORDER CODE	103764	103765	103770
Input Wattage	3W	3W	4.5W
Voltage	120V		
Delivered Lumens (lm)	350 lm	350 lm	450 lm
Efficacy (lm/W)	116 lm/W	116 lm/W	90 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2,700K	5,000K	2,700K
Replacement	40W Inc		
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥15,000 hours		
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

G40 - 8.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)	G40 CLEAR (E26 BASE)	G40 FROSTED (E26 BASE)	G25 FROSTED 4026 BASE)
MODEL NUMBER	EF8.5G40D927/JA81	EF8.5G40D930/JA81	EFF8.5G40D927/JA81	EFF8.5G40D930/JA81
ORDER CODE	110603	110604	110605	110606
Input Wattage	8.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	800 lm			
Efficacy (lm/W)	94 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G40 - 10W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)	G40 CLEAR (E26 BASE)	G40 FROSTED (E26 BASE)	G40 FROSTED (E26 BASE)
MODEL NUMBER	EF10G40D927/JA81	EF10G40D930/JA81	EFF10G40D927/JA81	EFF10G40D930/JA81
ORDER CODE	110607	110608	110609	110610
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1,100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	150W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G40 - 12W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)		G40 FROSTED (E26 BASE)	
MODEL NUMBER	EF12G40D927/JA81	EF12G40D930/JA81	EFF12G40D927/JA81	EFF12G40D930/JA81
ORDER CODE	110611	110612	110613	110614
Input Wattage	12W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K	3,000K	2,700K	3,000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥15,000 hours			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G16.5 - 5W, Dimmable Globe Lamp



CCTs Available:



	G16 (E12 BASE)	
MODEL NUMBER	5G16.5DLED927/G3	
ORDER CODE	104065	
Input Wattage	5W	
Voltage	120V	
Delivered Lumens (lm)	350 lm	
Efficacy (lm/W)	80 lm/W	
Color Rendering Index (CRI)	≥90	
Color Temperature (CCT)	2,700K	
Replacement	40W INC	
Dimming Compatible	Yes - Triac/10-100%	
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	UL, T20, FCC	

G25 - 10W, Dimmable Globe Lamp - JA8



CCTs Available:




	G25 (E26 BASE)	
MODEL NUMBER	10G25DLED927/JA8	
ORDER CODE	1409460	
Input Wattage	10W	
Voltage	120V	
Delivered Lumens (lm)	800 lm	
Efficacy (lm/W)	80 lm/W	
Color Rendering Index (CRI)	≥92	
Color Temperature (CCT)	2,700K	
Replacement	100W INC	
Dimming Compatible	Yes - Triac/10-100%	
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	UL, RoHS Compliant, JA8	

A19 - 6W, 9W, 15W, Dimmable Enclosed Rated A-Lamps



CCTs Available:




	A19 (GU24 BASE)	A19 (GU24 BASE)	A19 (GU24 BASE)
MODEL NUMBER	E6A19GUDLED27/G8S1	E9A19GUDLED27/G8S1	E15A19GUDLED27/G8S
ORDER CODE	108939	108943	14099414
Input Wattage	6W	9W	15W
Voltage	120V		
Delivered Lumens (lm)	480 lm	800 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	89 lm/W	106 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K		
Replacement	40W INC	60W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	>25,000 hours		
LISTINGS	UL, RoHS Compliant, FCC		

A19 - 6W, 11W, 13W, Dimmable Enclosed Rated A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E6A19DLED27/G8	E11A19DLED27/G8	E13A19DLED27/G1S
ORDER CODE	14099390	14099399	106884
Input Wattage	6W	11W	13W
Voltage	120V		
Delivered Lumens (lm)	480 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	100 lm/W	123 lm/W
Color Rendering Index (CRI)	≥82	≥84	≥80
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥25,000 hours		
LISTINGS	UL, RoHS Compliant, FCC		

A19 - 5.5W, 9W, 11W, 15W, Dimmable Enclosed Rated A-Lamps - JA8



CCTs Available:




	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E5.5A19D927/JA8S1	E9A19D927/JA8S1	E11A19D927/JA8S1	E15A19D927/JA8S
ORDER CODE	108948	108951	108954	105484
Input Wattage	5.5W	9W	11W	15W
Voltage	120V			
Delivered Lumens (lm)	450 lm	800 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	89 lm/W	90 lm/W	100 lm/W	x lm/W
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2,700K, 3,000K, 4000K			
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%			
Lumen Maintenance (L70)	≥25,000 hours			
LISTINGS	cETLus listed, FCC, T20, JA8			

A21/A23 - 17W, 21W, 26W, High Output Dimmable A-Lamps



CCTs Available:




	A21 (E26 BASE)	A21 (E26 BASE)	A23 (E26 BASE)
MODEL NUMBER	17A21D27	21A21D27	26A23D27
ORDER CODE	102721	102717	102713
Input Wattage	17W	21W	26W
Voltage	120V		
Delivered Lumens (lm)	2,000 lm	2,600 lm	3,000 - 3,200 lm
Efficacy (lm/W)	118 lm/W	123 lm/W	123 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K		
Replacement	125W INC	150W INC	200W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥25,000 hours		
LISTINGS	UL, FCC		

A21 - 20W, High Output Non-Dimmable A-Lamp



CCTs Available:



	A21 (E26 BASE)
MODEL NUMBER	E20A21ND30
ORDER CODE	105253
Input Wattage	20W
Voltage	120-277V
Delivered Lumens (lm)	2,600 lm
Efficacy (lm/W)	130 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K
Replacement	150W INC
Dimming Compatible	No
Lumen Maintenance (L70)	≥25,000 hours
LISTINGS	UL, RoHS Compliant, FCC

A21 - 4W, 9W, 15W, 21W, 3-Way A-Lamps



CCTs Available:




	A21 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	15A21/3W927	21A21/3W27
ORDER CODE	14098774	14102107
Input Wattage	4W/9W/15W	21W
Voltage	120V	
Delivered Lumens (lm)	500/1,000/1,600	620/1,600/2,150 lm
Efficacy (lm/W)	> 100 lm/W	89/107/103 lm/W
Color Rendering Index (CRI)	≥91	≥80
Color Temperature (CCT)	2,700K	2,700K, 3,000K, 5,000K
Replacement	40/60/100W INC	50W/100W/150W INC
Dimming Compatible	No	
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	UL, RoHS Compliant, FCC, T20	

A19 - 8W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:




MODEL NUMBER	E8A19DLED30/G2T
ORDER CODE	109717
Input Wattage	8W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	100 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	≥25,000 hours
LISTINGS	cETLus listed, RoHS Compliant, FCC

A19 - 10W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:




MODEL NUMBER	E10A19D27/4P/WS2T
ORDER CODE	109712
Input Wattage	10W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	1100 lm
Efficacy (lm/W)	110 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	≥25,000 hours
LISTINGS	cETLus listed, RoHS Compliant, FCC

A19 - 13W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:



MODEL NUMBER	E13A19D27/4P/WS2T
ORDER CODE	109714
Input Wattage	13W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	1600 lm
Efficacy (lm/W)	123 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	≥25,000 hours
LISTINGS	UL, RoHS Compliant, FCC



SMART A19 LAMP



MODEL NUMBER	E9A19SMTR
ORDER CODE	110371
Input Wattage	9W
Voltage	120V AC
Delivered Lumens (lm)	800 lms
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	RGB, 2,700K-6,500K Tunable
Replacement	60W Inc.
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	≥25,000 hours
LISTINGS	UL listed, FCC CFR Title 47 Part 15 Subpart B Class B, RoHS

A19 - 8W, 9W, CCT Selectable A-Lamps



A19 (E26 BASE)



CCTs Selectable:



MODEL NUMBER	DTDE9A19NDCS	E8A19D9CS/JA8
ORDER CODE	108274	108391
Input Wattage	9W	8W
Voltage	120-277V	120V, 60Hz
Delivered Lumens (lm)	800 lm	
Efficacy (lm/W)	83 lm/W	100 lm/W
Color Rendering Index (CRI)	≥80	≥90
Color Temperature (CCT)	2,700K/3,000K/4,000K	
Environment	Damp Enclosed	
Dimming Compatible	No	Triac 10%-100%
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	UL, T20, FCC, RoHS Compliant	

PL-Single, Type A+B Hybrid



3.5PLSH/AB/G238CS



5.5PLSH/AB/GX238CS



5PLSO/AB/G23835



7PLSO/AB/GX23827

CCTs Selectable:



CCTs Available:



LISTINGS

MODEL NUMBER	3.5PLSH/AB/G238CS	5.5PLSH/AB/GX238CS	5PLSO/AB/G23835	7PLSO/AB/GX23827
ORDER CODE	112194	112200	112198	112202
Input Wattage	3.5W	5.5W	5W	7W
Installation Position	Horizontal		Omnidirection/AI	
Voltage	120-277V			
Delivered Lumens (lm)	400 lm at Fixed CCT 5,000K 360 to 400 lm at 2,700K, 3,000K, 3,500K, 4,000K	620 lm at Fixed CCT 5,000K 580 to 620 lm at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K	600 to 650 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	800 to 880 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K
Efficacy (lm/W)	114 lm/W at Fixed CCT 5,000K 103 to 114 lm/W at 4 CCT Selectable 2700K, 3,000K, 3500K, 4,000K	113 lm/W at Fixed CCT 5,000K 106 to 113 lm/W at 4 CCT Selectable 2700K, 3,000K, 3500K, 4,000K	120 to 130 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	114 to 126 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	Fixed CCT 5,000K, 4 CCT Selectable 2,700K/3,000K/3,500K/4,000K Default Setting for CS models is 4,000K		Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	
Surge Protection	Type B surges are 500V			
Dimming Technology	N/A			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, cULus listed, cULus classified, FCC, RoHS Complaint, NSF/ ANSI 2 - Food Equipment			

PL-Double, Type A+B Hybrid



7PLDO/AB/G24D827



8.5PLDO/AB/G24D850



8.5PLDO/AB/G24D8CS



8.5PLDO/ABD/G24Q827



8.5PLDO/ABD/G24Q8CS

CCTs Selectable:



CCTs Available:



LISTINGS

MODEL NUMBER	7PLDO/AB/G24D827	8.5PLDO/AB/G24D850	8.5PLDO/AB/G24D8CS	8.5PLDO/ABD/G24Q827	8.5PLDO/ABD/G24Q8CS
ORDER CODE	112206	112211	112210	112213	112212
Input Wattage					
Installation Position	Omnidirection/AI				
Voltage	120V				
Delivered Lumens (lm)	800 to 880 lm at Fixed CCT 2700K, 3000K, 3500K, 4000K	1,200 lm at Fixed CCT 5,000K 1,050 to 1,200 lm at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 400K	1,200 lm at Fixed CCT 5,000K 1050 to 1,200 lm at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 400K	1200 lm at Fixed CCT 5,000K 1,050 to 1200 lm at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 400K	1200 lm at Fixed CCT 5000K 1,050 to 1,200 lm at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 400K
Efficacy (lm/W)	114 to 126 lm/W at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	135 lm/W at Fixed CCT 5,000K 124 to 135 lm/W at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K	135 lm/W at Fixed CCT 5,000K 124 to 135 lm/W at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K	135 lm/W at Fixed CCT 5000K 124 to 135 lm/W at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K	135 lm/W at Fixed CCT 5,000K 124 to 135 lm/W at 4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K
Color Rendering Index (CRI)	≥80				
Color Temperature (CCT)	Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K		Fixed CCT 5,000K, 4 CCT Selectable 2,700K/3,000K/3,500K/4,000K Default Setting for CS models is 4,000K		
Surge protection	Type B surges are 500V				
Dimming Compatible	TBD				
Lumen Maintenance (L70)	≥50,000 hours				
LISTINGS	DLC, cULus listed, cULus classified, FCC, RoHS Complaint, NSF/ ANSI 2 - Food Equipment				

PL-Double, Type A



9.5PLDH/DFD/G24Q8CS



9.5PLDV/DFD/G24Q827



9.5PLDV/DFD/G24Q8CS

CCTs Selectable:



CCTs Available:



LISTINGS

MODEL NUMBER	9.5PLDH/DFD/G24Q8CS	9.5PLDH/DFD/G24Q827	9.5PLDV/DFD/G24Q8CS
ORDER CODE	112215	112216	112218
Input Wattage	9.5W	9.5W	9.5W
Installation Position	Horizontal	Horizontal	Vertical
Voltage	Ballast Dependant		
Delivered Lumens (lm)	950 lm at Fixed CCT 2700K 1,050 lm at Fixed CCT 5000K 360 to 1,050 lm at 3 CCT Selectable 3,000K/3,500K/4,000K	950 lm at Fixed CCT 2,700K 1,050 lm at Fixed CCT 5,000K 360 to 1,050 lm at 3 CCT Selectable 3,000K/3,500K/4,000K	1000 lm at Fixed CCT 2,700K 1,150 lm at Fixed CCT 5,000K 1,050 to 1,150 lm at 3 CCT Selectable 3,000K/3,500K/4,000K
Efficacy (lm/W)	100 lm/W at Fixed CCT 2,700K 111 lm/W at Fixed CCT 5,000K 101 to 111 lm/W at 3 CCT Selectable 3,000K/3,500K/4,000K	100 lm/W at Fixed CCT 2,700K 111 lm/W at Fixed CCT 5,000K 101 to 111 lm/W at 3 CCT Selectable 3,000K/3,500K/4,000K	105 lm/W at Fixed CCT 2,700K 121 lm/W at Fixed CCT 5,000K 111 to 121 lm/W at 3 CCT Selectable 3,000K/3,500K/4,000K
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	Fixed CCT 5,000K, 4 CCT Selectable 2,700K/3,000K/3,500K/4,000K Default Setting for CS models is 4,000K
Surge Protection	N/A		
Dimming Technology	Dimmable - Details TBD		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	DLC, cULus listed, cULus classified, FCC, Rohs, ETL Sanitation listed: Food Equipment		

PL-Triple, Type A



14.5PLTH/DFD/G24Q830



17PLTV/DFD/G24Q830

CCTs Available:



MODEL NUMBER	14.5PLTH/DFD/G24Q830	17PLTV/DFD/G24Q830
ORDER CODE	112231	
Input Wattage	14.5W	17W
Installation Position	Horizontal	Vertical
Voltage	Ballast Dependant	
Delivered Lumens (lm)	1,950 lm at Fixed CCT 3,000K 1,950 lm at Fixed CCT 3,500K 2,050 lm at Fixed CCT 4,000K 2,050 lm at Fixed CCT 5,000K	2,050 lm at Fixed CCT 3000K 2,050 lm at Fixed CCT 3,500K 2,150 lm at Fixed CCT 4000K 2,150 lm at Fixed CCT 5,000K
Efficacy (lm/W)	130 lm/W at Fixed CCT 3,000K 130 lm/W at Fixed CCT 3,500K 137 lm/W at Fixed CCT 4,000K 137 lm/W at Fixed CCT 5,000K	121 lm/W at Fixed CCT 3,000K 121 lm/W at Fixed CCT 3,500K 126 lm/W at Fixed CCT 4,000K 126 lm/W at Fixed CCT 5,000K
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	Fixed CCT 3,000K/3,500K/4,000K	
Surge Protection	N/A	
Dimming Technology	Dimmable - Details TBD	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	DLC, cULus listed, cULus classified, FCC, Rohs, ETL Sanitation listed: Food Equipment	



PL-Triple, Type B



14.5PLTH/G24D830



17PLTV/G24Q830



15PLTO/GX24D8CS




17PLTO/GX24D8CS

CCTs Selectable:



CCTs Available:



MODEL NUMBER	14.5PLTH/G24D830	17PLTV/G24Q830	15PLTO/GX24D8CS	17PLTO/GX24D8CS
ORDER CODE	112223	112227	112221	112222
Input Wattage	15.5	16.5	15W	17W
Installation Position	Horizontal	Vertical	Omnidirection/AI	
Voltage	120-277V AC, 60 Hz		120-277V AC, 50/60 Hz	
Delivered Lumens (lm)	1,900 lm at Fixed CCT 3,000K 1,900 lm at Fixed CCT 3,500K 2,000 lm at Fixed CCT 4,000K 2,000 lm at Fixed CCT 5,000K	1,900 lm at Fixed CCT 3,000K 1,900 lm at Fixed CCT 3,500K 2,000 lm at Fixed CCT 4,000K 2,000 lm at Fixed CCT 5,000K	1,900 to 2,200 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	2,200 to 2,500 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K
Efficacy (lm/W)	123 lm/W at Fixed CCT 3,000K 123 lm/W at Fixed CCT 3,500K 129 lm/W at Fixed CCT 4,000K 129 lm/W at Fixed CCT 5,000K	123 lm/W at Fixed CCT 3,000K 123 lm/W at Fixed CCT 3,500K 129 lm/W at Fixed CCT 4,000K 129 lm/W at Fixed CCT 5,000K	127 to 146 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K	126 to 147 lm at Fixed CCT 2,700K, 3,000K, 3,500K, 4,000K
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	Fixed CCT 3,000K/3,500K/4,000K		4 CCT Selectable 2,700K, 3,000K, 3,500K, 4,000K	
Surge Protection	Type B surges are 500V			
Dimming Compatible	N/A			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, UL, FCC			

PL Retrofit Lamps - 6W, Ballast Bypass CCT Selectable (UL-B)



CCTs Selectable:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	6PLE26CS	6PLG24QCS	6PLGU24CS	6PLGX23CS
ORDER CODE	104735	104736	104737	104738
Input Wattage	6W			
Voltage	120-277V			
Delivered Lumens (lm)	550/575/600/625 lm			
Efficacy (lm/W)	92/96/100/104 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K			
Replacement	9W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 8W, Ballast Bypass CCT Selectable (UL-B)



CCTs Selectable:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	8PLE26CS	8PLG24QCS	8PLGU24CS	8PLGX23CS
ORDER CODE	104739	104740	104741	104742
Input Wattage	8W			
Voltage	120-277V			
Delivered Lumens (lm)	950/975/1,000/1,050 lm			
Efficacy (lm/W)	119/122/125/131 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K			
Replacement	13W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 11W, Ballast Bypass CCT Selectable (UL-B)



CCTs Selectable:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	11PLE26CS	11PLG24QCS	11PLGU24CS	11PLGX23CS
ORDER CODE	104743	104744	104745	104746
Input Wattage	11W			
Voltage	120-277V			
Delivered Lumens (lm)	1,400/1,425/1,450/1,500 lm			
Efficacy (lm/W)	127/130/132/136 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	2,700K/3,000K/3,500K/4,000K/5,000K			
Replacement	26W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 9W, DirectFit Ballast Compatible CCT Selectable (UL-A)



CCTs Selectable:



	HORIZONTAL PL (G24q BASE)	VERTICAL PL (G24q BASE)
MODEL NUMBER	9PLG24QHCS	9PLG24QVCS
ORDER CODE	104733	104734
Input Wattage	9W	
Voltage	120-277V	
Delivered Lumens (lm)	1,025/1,050/1,100 lm	
Efficacy (lm/W)	93/95/100 lm/W	
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3,000K/3,500K/4,000K	
Replacement	18/26 CFL	
Dimming Compatible	No	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	UL, DLC, FCC	

PLL Retrofits, 13W, DirectFit Lamps



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	13PLLA35-CG	13PLLA40-CG	13PLLA50-CG
ORDER CODE	14100784	14100785	103285
Input Wattage	13W		
Voltage	120-277V		
Delivered Lumens (lm)	2,050 lm	2,100 lm	2,100 lm
Efficacy (lm/W)	124 lm/W	127 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K, 4,000K, 5,000K		
Replacement	40W CFL		
Dimming Compatible	No		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	DLC, UL, FCC		

PLL Retrofits, 17W Bypass Lamps (Type B)



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	17PLL35-CG	17PLL40-CG	17PLL50-CG
ORDER CODE	14100787	14100788	14100789
Input Wattage		17W	
Voltage		120-277V	
Delivered Lumens (lm)	2,150 lm	2,200 lm	2,200 lm
Efficacy (lm/W)	127 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		3,500K, 4,000K, 5,000K	
Replacement		40W CFL	
Dimming Compatible		No	
Lumen Maintenance (L70)		≥50,000 hours	
LISTINGS	UL Classified, UL UR, FCC		

MR16 - 8W, GU5.3 Base Lamps Flood/Narrow Flood - JA8



CCTs Available:



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D5927FL35/JA8/G4	8MR16D5927NF25/JA8/G4	8MR16D5927SP15/JA8/G4
ORDER CODE	113587	1113585	113586
Input Wattage		8W	
Voltage		12V AC	
Delivered Lumens (lm)		500 lm	
Efficacy (lm/W)		73 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)		2,700K, 3,000K	
Replacement		50W INC	
Beam Angle	15°	25°	35°
Dimming Compatible		No	
Lumen Maintenance (L70)		≥25,000 hours	
LISTINGS	UL, T20, JA8		

MR16 - 8W, GU5.3 Base Lamps Flood/Narrow Flood/ Spot - JA8



CCTs Available:



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D7927FL35/JA8/G4	8MR16D7927NF25/JA8/G4
ORDER CODE	113591	113592
Input Wattage		8W
Voltage		12V AC
Delivered Lumens (lm)		560 lm
Efficacy (lm/W)		74 lm/W
Color Rendering Index (CRI)		≥90
Color Temperature (CCT)	2,700K	3,000K
Replacement		50W INC
Beam Angle	25°	35°
Dimming Compatible		No
Lumen Maintenance (L70)		≥25,000 hours
LISTINGS	UL, T20, JA8	

MR16 - 4W, GU10 Base Lamps Flood



MR16 (GU10 BASE)



CCTs Available:



MODEL NUMBER	6.5MRGD927FL/JA8/G4	6.5MRGD927NF/JA8/G4
ORDER CODE	113581	113582
Input Wattage	4W	
Voltage	120V	
Delivered Lumens (lm)	500 lm	
Efficacy (lm/W)	79 lm/W	
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	2,700K, 3,000K	
Replacement	35W INC	
Beam Angle	40°	
CBCP (cd)	418 cd	
Dimming Compatible	Yes - Triac/10-100%	
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	UL, RoHS Compliant	

BR - 7W, 8W, 11W, 12W, 17W, Dimmable Lamps



BR20 (E26 BASE) BR30 (E26 BASE) BR30 (E26 BASE) BR40 (E26 BASE) BR40 (E26 BASE)



CCTs Available:



MODEL NUMBER	7BR20DLED27/G3	8BR30DLED27/G3	11BR30DLED27/G3	12BR40DLED27/G3	17BR40DLED27/G3
ORDER CODE	14099046	14099049	14099421	14099052	14099418
Input Wattage	7W	8W	11W	12W	17W
Voltage	120V				
Delivered Lumens (lm)	550 lm	650 lm	850 lm	1,050 lm	1,400 lm
Efficacy (lm/W)	78 lm/W	81 lm/W	77 lm/W	88 lm/W	82 lm/W
Color Rendering Index (CRI)	80	84	83	82	82
Color Temperature (CCT)	2,700K, 3,000K, 4,000K, 5,000K				
Replacement	50W INC	65W INC	65W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%				
Lumen Maintenance (L70)	≥25,000 hours				
LISTINGS	cULus, FCC, RoHS Compliant				

Value R/BR - 6W, 8W, 13W, Dimmable Lamps



R20 (E26 BASE) BR30 (E26 BASE) BR40 (E26 BASE)



CCTs Available:



MODEL NUMBER	6R20DV27	8BR30DV27	13BR40DV27
ORDER CODE	102574	102620	102630
Input Wattage	6W	8W	13W
Voltage	120V		
Delivered Lumens (lm)	325 lm	650 lm	900 lm
Efficacy (lm/W)	54 lm/W	81 lm/W	69 lm/W
Color Rendering Index (CRI)	≥82		
Color Temperature (CCT)	2,700K, 3,000K, 5,000K		
Replacement	35W INC	65W INC	85W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥11,000 hours		
LISTINGS	cULus, RoHS Compliant		

PAR - 11W, 13W, 15W, Dimmable Lamps Wet Location



CCTs Available:



	PAR30 SHORT (E26 BASE)	PAR30 LONG (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	11P30D27FL	11P30WLN27FL	13P38WD27FL	13P38WD27NF	15P38WD27FL
ORDER CODE	14099226	14099203	14099206	14099219	14099210
Input Wattage	11W	11W	13W	13W	15W
Voltage	120V				
Delivered Lumens (lm)	850 lm	850 lm	1,050 lm	1,050 lm	1,250 lm
Efficacy (lm/W)	77 lm/W	77 lm/W	80 lm/W	80 lm/W	83 lm/W
Color Rendering Index (CRI)	≥83		≥80		≥83
Color Temperature (CCT)	2700K, 3000K, 4000K				
Replacement	75W INC	75W INC	100W INC	100W INC	120W INC
Beam Angle	40°	40°	40°	30°	40°
Dimming Compatible	Yes - Triac/10-100%				
Lumen Maintenance (L70)	≥25,000 hours				
LISTINGS	cULus, FCC, RoHS Compliant				

PAR - 11W, 14W, Dimmable Lamps - JA8 Wet Location



CCTs Available:



	PAR30 SHORT NECK (E26 BASE)	PAR30 LONG NECK (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	11P30D927FL/JA8	11P30LND927FL/JA8	14P38D927FL/JA8
ORDER CODE	14101683	14101685	14101687
Input Wattage	11W	11W	14W
Voltage	120V		
Delivered Lumens (lm)	975 lm	975 lm	1,250 lm
Efficacy (lm/W)	88 lm/W	88 lm/W	89 lm/W
Color Rendering Index (CRI)	≥90		
Color Temperature (CCT)	2,700K, 3,000K		
Replacement	75W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	≥25,000 hours		
LISTINGS	UL, T20, JA8		

PAR - 13W, 17W, 277V Lamps Wet Location



CCTs Available:



	277V PAR30 LONG NECK (E26 BASE)	277V PAR38 (E26 BASE)
MODEL NUMBER	13P30LNLED230FL	17P38LED230FL
ORDER CODE	74686	74687
Input Wattage	13W	17W
Voltage	277V	
Delivered Lumens (lm)	1,000 lm	1,700 lm
Efficacy (lm/W)	77 lm/W	100 lm/W
Color Rendering Index (CRI)	≥82	
Color Temperature (CCT)	3,000K, 4,000K	
Replacement	90W	120W
Dimming Compatible	No	
Lumen Maintenance (L70)	≥25,000 hours	
LISTINGS	cRUus, FCC, RoHS Compliant	



Value PAR - 7W, 10W, 13W, Non-Dimmable Lamps PAR Lamps



CCTs Available:

3000K



	PAR20 (E26 BASE)	PAR30 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	7P20NDV30FL	10P30NDV30FL	13P38NDV30FL
ORDER CODE	102646	102648	102650
Input Wattage	7W	10W	13W
Voltage		120V	
Delivered Lumens (lm)	425 lm	750 lm	1,000 lm
Efficacy (lm/W)	60 lm/W	75 lm/W	76 lm/W
Color Rendering Index (CRI)		≥82	
Color Temperature (CCT)		3,000K	
Replacement	50W INC	65W INC	90W INC
Beam Angle		40°, Flood	
Dimming Compatible		No	
Lumen Maintenance (L70)		≥11,000 hours	
LISTINGS		cULus, RoHS Compliant	

VersaMax T8 Modular 8 ft. Type B




MODEL NUMBER	L24MT8DE8WCS-CG		
ORDER CODE	112555		
Input Wattage	24W	32W	40W
Voltage	120-277V		
Efficacy (lm/W)	135 lm/W - 150 lm/W	130 lm/W - 140 lm/W	125 lm/W - 135 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/3,500K/4,000K/5,000K/6,500K		
Surge Protection	Type B surges are 700V for single ended, 1000V for double ended		
Dimming Technology	Dimmable - 120V Triac (10-100%)		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	cULus Classified, cULus components RU, FCC, ETL Sanitation Listed		

CCTs Selectable:



VersaMax T8 UL Type A+B Hybrid

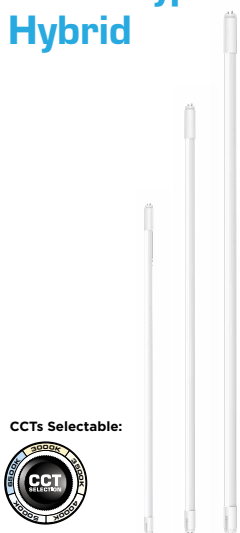

	2 ft.	3 ft.	4 ft.
MODEL NUMBER	L10T8AB2CS-PCG	L12T8AB3CS-PCG	L13T8AB4CS-PCG
ORDER CODE	112145	112144	112143
Input Wattage	Type A: 9W (Tube), 12W (System) Type B: 10W	Type A: 11W (Tube), 14W (System) Type B: 12W	Type A: 12W (Tube), 15.5W (System) Type B: 13W
Voltage	120-277V		
Delivered Lumens (lm)	1425-1450 lm	1650-1700 lm	1900-1950 lm
Efficacy (lm/W)	Type A: 120-121 lm/W Type B: 143-145 lm/W	Type A: 120-121 lm/W Type B: 138-142 lm/W	Type A: 120-122 lm/W Type B: 146-150 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/3,500K/4,000K/5,000K/6,500K		
Beam Angle	180°		
Dimming Compatible	Ballast dependent in Type A applications. TRIAC dimming at 120V AC in Type B applications		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, cULus listed, cULus classified, FCC, Rohs, ETL Sanitation listed: Food Equipment		

CCTs Selectable:



VersaMax T8 UL Type B Ballast Bypass



MODEL NUMBER	L10.5T8SDE4WCS-PCG		
ORDER CODE	112555		
Input Wattage	10.5W	12.5W	14.5W
Voltage	120-277V		
Delivered Lumens (lm)	1,600-1,650 lm	1,800-1,900 lm	2,100-2,200 lm
Efficacy (lm/W)	147-157 lm/W	144-152 lm/W	145-152 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K/3,500K/4,000K/5,000K/6,500K		
Beam Angle	180°		
Dimming Technology	120V Phase cut dimming and Trail Edge with External Dimming Module		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, cULus classified, cULus components RU, FCC, Rohs Complaint, ETL Sanitation - Food Equipment Suitable for use in enclosed luminaires with maximum 4 lamps. Fixture Operating Temperature: 25°C/77°F (Check Instruction Manual for more information)		

CCTs Selectable:



8 ft. T8 LED Linear Utility Strip - Lamp Ready



8 ft.	
MODEL NUMBER	LSS-8U4XT8SE
ORDER CODE	112147
Maximum Wattage	4x22W
Voltage	120-277V, 50/60Hz
Lamp Operation Base	Single Ended/ G13 base
Warranty	5 years
Color Rendering Index (CRI)	≥80
Operating Temperature (CCT)	-4°F to 104°F
Housing	Galvanized Steel with white powder coating
Environment	Damp locations
Product Weight	6 lbs.
Certifications	ETL Listed, RoHS

T8 U-Bend - 13W, LED 6 Inch, (UL-A) Direct Fit



CCTs Available:

3500K



T8 U-BEND (G13 PIN BASE)	
MODEL NUMBER	U13T8DF235
ORDER CODE	1409015
Input Wattage	13W (Bare Lamp)
Voltage	(Ballast Dependent)
Delivered Lumens (lm)	1,800 lm
Color Rendering Index (CRI)	≥85
Color Temperature (CCT)	3,500K
Replacement	32W FLUOR
Dimming Compatible	No
Lumen Maintenance (L70)	≥50,000 hours
LISTINGS	UL, DLC

4000K & 5000K options also available.

T8 U-Bend - 15.5W, LED 6 Inch, (UL-B) Ballast Bypass



CCTs Available:

3500K 4000K



	T8 U-BEND (PLASTIC, G13 PIN BASE)	T8 U-BEND (PLASTIC, G13 PIN BASE)
MODEL NUMBER	U15.5T8SE235	U15.5T8SE240
ORDER CODE	1409561	1409562
Input Wattage		15.5W
Voltage		120-277V
Delivered Lumens (lm)	1,800 lm	1,850 lm
Efficacy (lm/W)	116 lm/W	119 lm/W
Color Rendering Index (CRI)		≥80
Color Temperature (CCT)	3,500K	4,000K
Replacement		32W FLUOR
Dimming Compatible	No	No
Lumen Maintenance (L70)		≥50,000 hours
LISTINGS		UL Classified, rUL, DLC

T8 Tube, 9.5W, LED 4FT, (UL-A) Direct Fit



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9.5T8DF435-CG (Special Order Only)	L9.5T8DF440-CG
ORDER CODE	14099192	14099190
Input Wattage	9.5W (Bare Lamp)	
Voltage	120V-347V (Ballast Dependent)	
Delivered Lumens (lm)	1,700 lm	
Efficacy (lm/W)	131 lm/W	
Color Rendering Index (CRI)	≥82	
Color Temperature (CCT)	3500K	4000K
Replacement	32W FLUOR	
Dimming Compatible	Yes (Ballast Dependent)	
Lumen Maintenance (L70)	≥50,000 hours	
LISTINGS	UL, ETL Sanitation, DLC	

T8 Tube, 13W, LED 4FT, (UL-A) Direct Fit



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L13T8DF435-CG5	L13T8DF440-CG5	L13T8DF450-CG5
ORDER CODE	14098818	14098819	107223
Input Wattage	13W (Bare Lamp)		
Voltage	120V-347V		
Delivered Lumens (lm)	1,800 lm	1,850 lm	1,900 lm
Efficacy (lm/W)	116 lm/W	116 lm/W	119 lm/W
Color Rendering Index (CRI)	≥83		
Color Temperature (CCT)	3,500K	4,000K	5,000K
Replacement	32W FLUOR		
Dimming Compatible	Yes (Ballast Dependent)		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, ETL Sanitation, DLC		

T8 Tube, 12W, LED 4FT, Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12.5T8SE435-CG	L12.5T8SE440-CG	L12.5T8SE450-CG
ORDER CODE	14098989	14098990	1098991
Input Wattage	12.5W		
Voltage	120-277V		
Delivered Lumens (lm)	1,600 lm	1,650 lm	1,650 lm
Efficacy (lm/W)	132 lm/W	140 lm/W	144 lm/W
Color Rendering Index (CRI)	≥ 80		
Color Temperature (CCT)	3,500K	4,000K	5,000K
Replacement	32W FLUOR		
Dimming Compatible	No		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL Classfield, DLC		



T8 Tube, 9W, LED 2FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2' T8 (COATED GLASS, G13 PIN BASE)		2' T8 (COATED GLASS, G13 PIN BASE)	2' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9T8DE235-CG4	L9T8DE240-CG4	L9T8DE250-CG4	
ORDER CODE	1409552	1409553	1409554	
Input Wattage	9W			
Voltage	120-277V			
Delivered Lumens (lm)	1,125 lm	1,200 lm	1,250 lm	
Efficacy (lm/W)	125 lm/W	133 lm/W	139 lm/W	
Color Rendering Index (CRI)	≥ 80			
Color Temperature (CCT)	3,500K	4,000K	5,000K	
Replacement	17W FLUOR			
Dimming Compatible	No			
Lumen Maintenance (L70)	>50,000 hours			
LISTINGS	UL Classified, ETL, DLC			

T8 Tube, 12W, LED 3FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	3' T8 (COATED GLASS, G13 PIN BASE)		3' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12T8DE335-CG4	L12T8DE340-CG4	L12T8DE350-CG4	
ORDER CODE	1409555	1409556	1409557	
Input Wattage	12W			
Voltage	120-277V			
Delivered Lumens (lm)	1,225 lm	1,250 lm	1,300 lm	
Efficacy (lm/W)	102 lm/W	104 lm/W	108 lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K	4,000K	5,000K	
Replacement	25W FLUOR			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL Classified, ETL, DLC			

T8 Tube, 9.5W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



Special Order Only



CCTs Available:



MODEL NUMBER	L9.5T8SDE430-CG	L9.5T8SDE435-CG	L9.5T8SDE440-CG	L9.5T8SDE450-CG
ORDER CODE	111590	111270	111271	111272
Input Wattage	9.5W			
Voltage	120-277V			
Delivered Lumens (lm)	1,600-1,650 lm			
Efficacy (lm/W)	168-173 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K	3,500K	4,000K	5,000K
Power Factor	≥ 0.9			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, cULus listed, FCC, Rohs Compliant, NSF/ANSI 2 - Food Equipment			

T8 Tube, 12W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



Special Order Only



CCTs Available:



MODEL NUMBER	L12T8SDE430-CG	L12T8SDE435-CG	L12T8SDE440-CG	L12T8SDE450-CG
ORDER CODE	111767	111768	111769	111770
Input Wattage	12W			
Voltage	120-277V			
Delivered Lumens (lm)	1,600-1,650 lm			
Efficacy (lm/W)	168-173 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K	3,500K	4,000K	5,000K
Power Factor	≥ 0.9			
Dimming Technology	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, cULus listed, FCC, Rohs Compliant, NSF/ANSI 2 - Food Equipment			

T8 Tube, 15W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



Special Order Only



CCTs Available:



MODEL NUMBER	L15T8SDE430-CG2	L15T8SDE435-CG2	L15T8SDE440-CG2	L15T8SDE450-CG2
ORDER CODE	111771	111772	111773	111774
Input Wattage	15W			
Voltage	120-277V			
Delivered Lumens (lm)	2,100-2,200 lm			
Efficacy (lm/W)	140-146 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,000K	3,500K	4000K	5,000K
Power Factor	≥ 0.9			
Dimming Technology	No			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	DLC, cULus listed, FCC, Rohs Compliant, NSF/ANSI 2 - Food Equipment			



T8 Tube, 38W, LED 8FT, Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



Special Order Only

MODEL NUMBER	L38T8DEFA835-CG	L38T8DEFA840-CG	L38T8DEFA850-CG
ORDER CODE	109130	109132	109133
Input Wattage	38W		
Voltage	120-277V, 50/60Hz		
Delivered Lumens (lm)	5,400 lm		
Efficacy (lm/W)	142 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,500K	4,000K	5,000K
Power Factor	≥ 0.9		
Dimming Compatible	No		
Lumen Maintenance (L70)	≥50,000 Hrs		
LISTINGS	DLC, cULus listed, cULus classified, FCC, Rohs, ETL Sanitation listed: Food Equipment		

T8 Tube, 12W, LED 2FT, 3FT, 4FT Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2' T8	3' T8	4' T8
MODEL NUMBER	L10T8AB2CS-PCG	L12T8AB3CS-PCG	L13T8AB4CS-PCG
ORDER CODE	112145	112144	112143
Input Wattage	Type A: 9W (Tube), 12W (System) Type B: 10W	Type A: 11W (Tube), 14W (System) Type B: 12W	Type A: 12W (Tube), 15.5W (System) Type B: 13W
Delivered Lumens (lm)	1425-1450 lm	1650-1700 lm	1900-1950 lm
Efficacy (lm/W)	Type A: 120-121 lm/W Type B: 143-145 lm/W	Type A: 120-121 lm/W Type B: 138-142 lm/W	Type A: 120-122 lm/W Type B: 146-150 lm/W
Voltage	120-277V AC, 50/60 Hz (Type B)		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3,000K, 3,500K, 4,000K, 5,000K, 6,500K		
Beam Angle	180°		
Dimming Technology	Ballast dependent in Type A applications. TRIAC dimming at 120V AC in Type B applications		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	DLC, cULus listed, cULus classified, FCC, Rohs, ETL Sanitation listed: Food Equipment		

T5 Tube, 12W, 13W, 16W, 25W LED 2FT, 3FT, & 4FT, Single/Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2FT	3FT	4FT	4FT
MODEL NUMBER	L12T5DE235-CG	L13T5DE435-CG	L16T5DE335-CG	L25T5DE435-CG
ORDER CODE	105045	105051	105048	105054
Input Wattage	12W	13W	16W	25W
Voltage	120-277V			
Delivered Lumens (lm)	1,500-1,600 lm	1,600-1,700 lm	2,000-2,100 lm	3,400-3,500 lm
Efficacy (lm/W)	125/133 lm/W	123-131 lm/W	125/131 lm/W	136-140 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3,500K, 4,000K, 5,000K			
Power Factor	≥0.90			
Beam Angle	>280°			
Operating Temperature	-4°F to 113°F (-20°C to 45°C)			
Lumen Maintenance (L70)	≥50,000 Hrs			
LISTINGS	DLC, UL listed for Dry/Damp Locations			

Battery Back Up for Type B Linear Tubes (10.5W and 11.5W)



MODEL NUMBER	T8B-BBU-S
ORDER CODE	110343
Input Wattage	10, 5W and 115W
Voltage	120-277V
LISTINGS	UL, ETL Sanitation, DLC

Emergency Battery Backup For Type-B Linear Lamps



MODEL NUMBER	T8B-BBU
ORDER CODE	103546
Input Wattage	5W
Voltage	120-277V
LISTINGS	UL, ETL Sanitation, DLC

Emergency Battery Backup For Type-C Linear Lamps



MODEL NUMBER	T8C-BBU
ORDER CODE	103548
Input Wattage	7W
Voltage	120-277V
LISTINGS	UL

LED Single-End Powered T8 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	3 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS
MODEL NUMBER	G13KIT1	G13KIT2	G13KIT3	G13KIT4
ORDER CODE	1409026	1409027	1409028	1409029
Lamps Configuration	1	2	3	4

LED Single-End Powered T5 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS	6 LAMP WIRING HARNESS
MODEL NUMBER	G5KIT1	G5KIT2	G5KIT4	G5KIT6
ORDER CODE	14098784	14098785	14098786	14098787
Lamps Configuration	1	2	3	4



G13 U-Bend Bypass T8 Non-Shunted Lamp Holder



MODEL NUMBER

G13UNS

ORDER CODE

14098795

G13 Low Profile T8 Non-Shunted Lamp Holder



MODEL NUMBER

G13LPNS

ORDER CODE

73978

G9 - 3W, 5W, LED Retrofit Miniature Lamp



CCTs Available:

2700K



	NON-DIM (G9 BASE)	DIM (G9 BASE)	NON-DIM (G9 BASE)	DIM (G9 BASE)
MODEL NUMBER	3G9LED27	3G9DLED27	5G9LED27	5G9DLED27
ORDER CODE	108071	108072	108073	108074
Input Wattage	3W	3W	5W	5W
Voltage	120V			
Delivered Lumens (lm)	270 lm	270 lm	480 lm	360 lm
Efficacy (lm/W)	90 lm/W	90 lm/W	96 lm/W	72 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	2700K			
Replacement	25W INC	25W INC	40W INC	40W INC
Dimming Compatible	No	Yes	No	Yes
Lumen Maintenance (L70)	≥25,000 hours			
LISTINGS	TUV			

WarrantyMax™ 10-Year Warranty

Key Features

Customers receive automatic 10-Year warranty coverage of most commercial and industrial LED fixtures - no registration or minimum product purchase required!*

	HIGHLIGHTS
Eligibility	Automatic with purchase *registration required for labor allowance
Start Date	Actual installation date, or 90 days after the original date of purchase (whichever comes first)
Minimum Purchase	No
Labor Allowance	\$25 / Unit on eligible models; Higher levels available for purchase
Operating Hours	16 hours/day maximum
Operating Temperature	-29°F to 104°F outdoor -4°F to 77°F indoor
Additional Coverage Available	YES!

Additional Coverage Available for:



Eligible products with a warranty of less than 10 years



Higher labor allowance
(\$350 coverage minimum applies; contact your MaxLite sales representative for details)

Extended coverage must be registered within 90 days of original purchase. All warranties are in effect only if the products are installed for and used in an application and operating temperature range for which it is rated, per the applicable product data sheet.

Warranty registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at:

www.maxlite.com/warranties

MaxLite may refuse, at its sole discretion, to allow extended warranty coverage to be added.

Standard Product Warranty Coverage

Check product datasheets for specific warranty coverage.



NOTES:

- For any question about warranty coverage contact MaxLite for warranty information.
- Any products marked as Clearance shall carry the lesser of a 5 Year warranty, or the warranty period stated on the product data sheet.
- All 10 Year warranties are based on a maximum 16 hrs/day operation, and ambient temperature of -29°F to 104°F (outdoor) and -4°F to 77°F (indoor), and include up to a \$25 labor allowance per item (registration for labor allowance required). If ambient temperatures fall outside the -4°F to 77°F range, product is warranted for 5 years according to the operating temperature range specified on the PDS.
- Extended warranty coverage may be purchased for products with a 5-year warranty, or for a higher labor allowance on products with a 10-year warranty. Standard warranty terms and conditions apply. Contact your MaxLite representative for product eligibility and pricing. Minimum purchase and site registration required.
- Warranty start date is the earlier of the actual installation date, or 90 after the original purchase (whichever comes first).
- It is not a requirement to register the warranty to receive product replacement warranty coverage; however, you must register the warranty if you want to be eligible to receive the labor allowance associated with the 10 Year Warranty.
- Accessories and emergency battery backup excluded. Motion sensor and Photocontrol components follow supplier's warranty.
- Warranty claim and registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at: www.maxlite.com/warranties

Terms subject to change. Go to MaxLite.com for complete Standard Product Warranty Terms and Conditions.



Ground Control!

Control your light distribution
CCT and power from
the ground!



AE Switch Area Light Remote Control It's Time to Make the Switch!



Four
Mounting
Options



Easy toolless
access to driver
compartment for
maintenance

- Two Housing Sizes
- Distribution, Wattage & CCT Switchable
- c-Max Controls Ready
- Superior Surge protection 6kV+10kA, 20kA option
- Industry lowest EPA allows safer, smaller and less expensive poles



cMax
CONTROLS COMPATIBLE



MaxLite
A NEW WAVE OF LIGHT

CR
CONTROLS READY



www.maxlite.com

MaxLite® Brands

MaxLite®

A NEW WAVE OF LIGHT



**ENHANCED
SERIES**



**VALUE
SERIES**

CMMax™

LIGHTING CONTROLS

CMMax™ BC

BASIC LIGHTING CONTROLS

CMMax™ NC

NETWORK LIGHTING CONTROLS

CMMax™ NP

NETWORK PARTNERS

CMMax™ RF

EasyRF™ CONTROLS **Coming Soon!**

MaxLiteHome™

MaxLitePro®

MaxLite Tools & Resources

YouTube Channel (MaxLiteNewsRoom)



Product Training Videos | Installation Videos

Social Media (Find, Like and Follow us on...)



LinkedIn



Twitter
@MaxLite



Facebook
@maxliteled



Instagram
@maxliteled

MaxLite.com



Product Datasheets | Case Studies | Catalogs & Brochures | ROI Calculator | Utility Rebate Finder | ENERGY STAR

MaxLiteUniversity.com



Free online lighting degree program | Eligible for ALA Credit Hours

Product Specific Micro Sites



www.maxlite.com/cmox



www.maxlite.com/mseries



www.maxlite.com/maxlite-home



www.maxlite.com/hazloc



www.maxlite.com/value-series



www.maxlite.com/enhanced-series



Find, like and follow us on social media



Corporate Headquarters
342 Changebridge Road,
Suite 201, Pine Brook, NJ 07058

Indiana Facility
305 Chaney Ave., Suite B
Greenwood, IN 46143

California Facility
711 W. Kimberly Ave., Suite 125
Placentia, CA 92870

Phone: 1-800-555-5629 | E-mail: info@maxlite.com
Item#: LEDGENCAT25 | Order Code: 113688